



food



agriculture



transport




public sectors



industry



# HOT STATIC

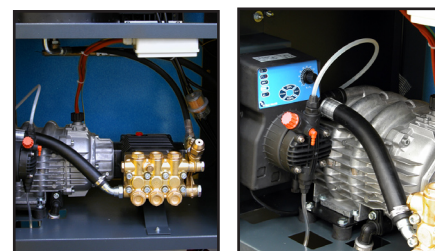

### HOT STATIC

- Integrated elastic joint • Auxiliary motor for burner air cooling and mechanical two ways fuel pump. • Control panel with protection cover
- Water leak detection, low fuel cut-off and standby complete shut-down. • High pressure detergent dosing pump. • 4 poles double roller bearing water cooled motor. • Low temperature internal insulation protection

### Optional:

- Flame sensor kit
- Remote control kit
- Low temperature internal heating kit

	HOT STATIC 12-100	HOT STATIC 15-200	HOT STATIC 21-150
Code	12100	12300	12400
operat. pressure	100 bar	200 bar	150 bar
operat. pressure	1470 psi	2940 psi	2205 psi
delivery rate	12 l/min	15 l/min	21 l/min
abs. power/voltage	3000W- 240V~50Hz (Ph1)	7300W- 415V~50Hz (Ph3)	7300W- 415V~50Hz (Ph3)
RPM	1450	1450	1450
diesel tank/ detergent tank	20/20 l.-5.28/5.28 gal	20/20 l.-5.28/5.28 gal	20/20 l.-5.28/5.28 gal
max temp. inlet/outlet	40 °C/140 °C	40 °C/140 °C	40 °C/140 °C
fuel consumption/head output	4,72 l/h - 58kW	4,72 l/h - 58kW	4,72 l/h - 58kW
machine dimensions	87,5x55x h 184 cm	87,5x55x h 184 cm	87,5x55x h 184 cm
machine weight	178 Kg	178 Kg	178 Kg