

Flat Surface Cleaners



Mecline Flat Surface Cleaners	132
Whirl-A-Way Flat Surface Cleaners	132 - 133
Mosmatic Rotary Flat Surface Cleaners	133
Fixed Jet Cleaning Heads	133
Chewing Gum Removers	134
Waterbrooms	134

Available from B&G Cleaning Systems
Call 0808 163 7983

Flat Surface Cleaners

14" Whirlaway

Part No.	Description	Nozzles
85.403.014	14" nylon skirt	2 x 25° 02

- Maximum pressure 275 Bar
- Maximum flow 30 Lpm
- Maximum temperature 85°C
- Polypropylene cover with nylon skirt
- BE series QR adaptor inlet - see p224
- Supplied with 2 x 1/4" nozzles



15" mecline BY TECOMEC

Part No.	Description	Nozzles
411010024	15" soft skirt for solar panels	2 x 25° 015
411010020	15" nylon skirt	2 x 25° 015

- Maximum pressure 200 Bar
- Maximum flow 11.4 Lpm
- Maximum temperature 60°C
- Polypropylene cover with nylon skirt
- BE series QR adaptor inlet - see p224
- Supplied with 2 x 1/4" nozzles



16" Whirlaway

Part No.	Description	Nozzles
BE1600WAW	16" nylon skirt	2 x 25° 025

- Maximum pressure 276 Bar
- Maximum flow 30 Lpm
- Maximum temperature 80°C
- Polypropylene cover with nylon skirt
- Supplied with trigger gun & nozzles
- Supplied with 2 x 1/4" nozzles
- M22 M trigger inlet



18" Whirlaway

Part No.	Description	Nozzles
BE1800WAW	18" castors	2 x 25° 025

- Maximum pressure 276 Bar
- Maximum flow 30 Lpm
- Maximum temperature 80°C
- Polypropylene cover with castor wheels
- Supplied with trigger gun & nozzles
- Supplied with 2 x 1/4" nozzles
- M22 M trigger inlet



20" Whirlaway

Part No.	Description	Nozzles
85.403.011	20" castors	2 x 25° 025

- Maximum pressure 276 Bar
- Maximum flow 30 Lpm
- Maximum temperature 80°C
- Polypropylene cover with nylon skirt
- Supplied with trigger gun & nozzles
- Supplied with 2 x 1/4" nozzles
- M22 M trigger inlet



20" Whirlaway

Part No.	Description	Nozzles
BE2000SS	20" castors	2 x 25° 025

- Maximum pressure 276 Bar
- Maximum flow 30 Lpm
- Maximum temperature 80°C
- Stainless steel cover with nylon skirt
- Supplied with trigger gun & nozzles
- Supplied with 2 x 1/4" nozzles
- M22 M trigger inlet



Flat Surface Cleaners

Whirlaway

Part No.	Description	Nozzles
BE2400SS	24" castors	3 x 25° 025

- Maximum pressure 276 Bar
- Maximum flow 30 Lpm
- Maximum temperature 80°C
- Stainless steel cover with nylon skirt
- Non marking castor wheels
- Supplied with trigger gun & nozzles
- Supplied with 3 x 1/4" nozzles
- M22 M trigger inlet



MOSMATIC

520mm Rotary Cleaning Head - Vacuum Port

Part No.	Description	Nozzles
80.764	20" castors	2 x 15° 03

- FL-AH Series
- Maximum pressure 350 Bar
- Maximum temperature 120°C
- 520mm Stainless steel cover
- On 4 castors
- 50mm vacuum extraction port
- Supplied with trigger gun & nozzles
- Supplied with 2 x 1/8" nozzles



MOSMATIC

300mm Rotary Cleaning Head

Part No.	Max Press	Max Temp	Weight
78.242	275 Bar	120°C	5.6 Kg

- FL-AER Series
- Complete with gun & lance assembly
- Stainless steel cover
- Durable brush skirt & castor wheels
- Swivel fitted with heavy-duty seal
- With 2 x 15° 03 nozzles, 1/8" thread
- Vacuum port Ø 50 mm
- 3/8" BSPF trigger inlet



PA

Fixed Jet Cleaning Head - Stainless Steel

Part No.	Description
29.0600.00	410mm cleaning head

- Maximum pressure 250 Bar
- Maximum flow 20 Lpm
- Maximum temperature 160°C
- M22 M inlet
- 4 x high press jets (80°, 015) & 1 chemical jet
- Stainless steel head and lance
- Trigger gun supplied separately



MOSMATIC

Lance Assembly for Rotary Heads

Part No.
200-1001

- Adjustable locking side handle
- Length 930mm
- M22 F inlet connection
- M22 F toggle outlet connection
- Adjustable toggle joint



MOSMATIC

200mm Rotary Cleaning Head

Part No.	Max Press	Max Temp	Weight
78.035	350 Bar	120°C	1.9Kg

- FL-ABB Series
- Brush skirt
- Stainless steel body
- 1/4" BSPF inlet
- Requires 2 x 1/8" nozzles
- Vacuum port Ø 50 mm



Flat Surface Cleaners




Chewing Gum Remover

Part No.	Max Press	Noz Size	Kg	Male Inlet
99.9721.045	250 Bar	045	2.0	M22M
99.9721.055	250 Bar	055	2.0	M22M
Dimensions 280L x 180H x 130W mm				

We recommend HOT water at a minimum pressure of 150 Bar & 12 Lpm

- Not supplied with gun or lance assembly
- Max temperature 90°C
- Can be used with most hot pressure washers
- Stainless steel wear strips

900mm Lance Assembly for Chewing Gum Remover

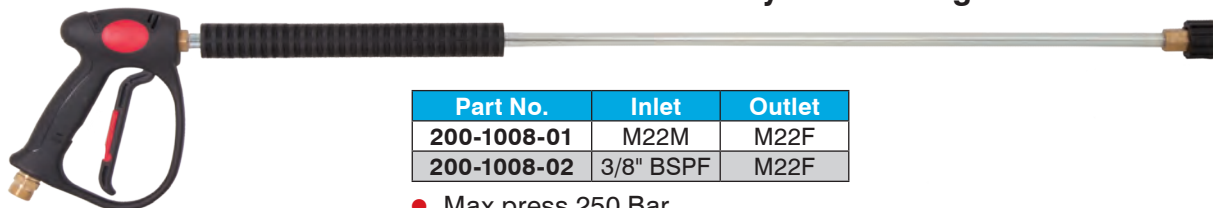

Part No.	Inlet	Outlet
200-1008-01	M22M	M22F
200-1008-02	3/8" BSPF	M22F

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 140°C

Chewing Gum Remover Head



Part No.	Nozzle
99.9761.045	045
99.9761.055	055

We recommend HOT water at a minimum pressure of 150 Bar & 12 Lpm

- Max press 350 Bar
- Max temp 90°C
- 1/4" F thread inlet
- Plated brass body
- 18 high impact ceramic jets
- 37mm Ø
- 113mm long

Waterbroom - 3 & 4 Nozzles



Part No.	Description	Nozzles	Max Flow
85.400.060	12" Waterbroom	3 x 65° 013	13.5 Lpm
85.400.061	16" Waterbroom	4 x 65° 013	18 Lpm

- Max press 275 Bar
- Max temp 90°C
- Aluminium construction
- Swivel castors with rubber wheels
- Inlet options included:
1/4" F thread
BE QR adaptor

16" Under Car Water Broom



Part No.
85.400.062

- Max press 275 Bar
- Max flow 18 Lpm
- Max temp 90°C
- 4x upward facing 65° 013 nozzles
- Aluminium body with castors
- 1/4" F or BE QR adaptor inlet

QR Couplings



Page 224