


Hose, Hose Clips, Sealant & Hose Nozzles



All Purpose Water Hose.....	196
Professional Water Hose.....	196
Clear PVC Tubing.....	196
Clear Braided PVC Hose.....	196
Wire Reinforced Clear PVC Hose.....	197
Crush Resistant Hose.....	197
Layflat Hose.....	197
Synthetic Rubber Hose.....	197
Spiral Hose	197
Microbore Hose.....	198
Oil Resistant Suction Hose.....	198
Diesel Drop Hose.....	198
Reinforced PVC Hose.....	198
Adblue Delivery Hose.....	198
Drain Jetting Hose & Accessories.....	199
Pratissoli Sewerjet 280 Drain Jetting Hose Accessories.....	199
High Pressure Hose.....	200 - 201
Spiral Wrap Hose Protector.....	201
Hose & Cable Protector.....	201
Hose Clips.....	202
O Clip Pliers & Pliers.....	202
Teflon® Tape.....	202

Available from B&G Cleaning Systems
Call 0808 163 7983

Low Pressure Hose

APWH Series All Purpose Water Hose



Part No.	Length	id	Bar
LGL1230	30m coil	1/2"	8

- Polyester reinforced PVC
- Highly flexible & good abrasion resistance
- Suitable for water
- For general purpose water applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose

MH Series Clear PVC Tubing



Part No.	Length	id
503-1006	per 1m	6mm
503-1006-30M	30m coil	
503-1008	per 1m	8mm
503-1008-30M	30m coil	
503-1010	per 1m	1/2"
503-1010-30M	30m coil	
503-1012	per 1m	3/4"
503-1012-30M	30m coil	
503-1016	per 1m	1 1/4"
503-1016-30M	30m coil	
503-1014	per 1m	1 1/2"
503-1014-30M	30m coil	

- Clear flexible PVC
- Smooth bore - Acid & chemically resistant
- Suitable for chemical, gases & foodstuffs
- For industrial & food applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose


PWH Series Professional Water Hose



Part No.	Length	id	Bar
GH12Y	per 1m	1/2"	10
GH12Y-25M	25m coil		
GH12Y-50M	50m coil		
GH16Y	per 1m	5/8"	10
GH16Y-25M	25m coil		
GH16Y-50M	50m coil		
GH19Y	per 1m	3/4"	10
GH19Y-25M	25m coil		
GH19Y-50M	50m coil		
GH25Y	per 1m	1"	10
GH25Y-25M	25m coil		
GH25Y-50M	50m coil		

- Polyester reinforced PVC
- Smooth bore - Good kink resistance
- Suitable for water
- For professional & industrial water applications
- Temp -10°C to 60°C
- Premium quality UK manufactured hose

HN Series Clear Braided PVC Hose



Part No.	Length	id	Bar
01-06	per 1m	1/4"	22
01-06-30M	30m coil		
01-516	per 1m	5/16"	21
01-516-30M	30m coil		
01-10	per 1m	3/8"	20
01-10-30M	30m coil		
01-12	per 1m	1/2"	16
01-12-30M	30m coil		
01-16	per 1m	5/8"	15
01-16-30M	30m coil		
01-19	per 1m	3/4"	15
01-19-30M	30m coil		
01-25	per 1m	1"	13
01-25-30M	30m coil		

- Polyester reinforced PVC
- Smooth bore - Chemically resistant
- Suitable for air, water & chemicals
- For pneumatic, industrial & food applications
- Temp -10°C to 60°C
- Premium quality UK manufactured hose

Low Pressure Hose


SF Springflex™ Wire Reinforced Clear PVC Hose CD Series Crush Resistant Hose



Part No.	Length	id	Bar
503-1013	per 1m	1/2"	10
503-1013-30M	30m coil		
503-1017	per 1m	5/8"	12
503-1017-30M	30m coil		
503-1001	per 1m	3/4"	11
503-1001-30M	30m coil		
503-1000	per 1m	1"	10
503-1000-30M	30m coil		

- Carbon steel wire reinforced PVC
- Excellent pressure, vacuum, kink & crush resistance
- Suitable for water, slurries, powder & foodstuffs
- For construction, marine, industrial & food applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose

PVC Layflat



Part No.	Length	id	Bar
P16LFB	per 1m	1"	7
P16LFB-100M	100m coil		
P20LFB	per 1m	1 1/4"	7
P20LFB-100M	100m coil		
P24LFB	per 1m	1 1/2"	5
P24LFB-100M	100m coil		
P32LFB	per 1m	2"	4.5
P32LFB-100M	100m coil		
P48LFB	per 1m	3"	4
P48LFB-100M	100m coil		
P64LFB	per 1m	4"	4
P64LFB-100M	100m coil		

- Temp -15°C to 60°C
- Sold by the metre or 100m coils



Part No.	Length	id	Bar
12-CD07	per 1m	3/4"	9
12-CD07-30M	30m coil		
12-CD10	per 1m	1"	8
12-CD10-30M	30m coil		
12-CD12	per 1m	1 1/4"	7
12-CD12-30M	30m coil		
12-CD15	per 1m	1 1/2"	6.5
12-CD15-30M	30m coil		
12-CD20	per 1m	2"	6
12-CD20-30M	30m coil		
12-CD30	per 1m	3"	4
12-CD30-30M	30m coil		
12-CD40	per 1m	4"	4
12-CD40-30M	30m coil		

- Crush resistant PVC helix reinforced PVC
- Smooth bore - Tough, flexible & weather resistant
- Suitable for water, slurries & powders
- For agricultural, construction & marine applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose

Synthetic Rubber



Part No.	Length	id	Bar
503-3003	per 1m	9.5mm	28

- 3/8" SAE100 R6 hose
- Temp -40°C to 100°C

10 Metre - Spiral with Fittings


Part No.
8000-7204

- Adjustable nozzle
- Quick release couplings
- Non-return check valve
- 10 Metre x 12 mm Ø



Low Pressure Hose

LAH Series Microbore Hose



Part No.	Length	id	Bar
503-1102	per 1m	5mm	22
503-1102-10M	10m coil		
503-1102-20M	20m coil		
503-1102-50M	50m coil		
503-1102-100M	100m coil		

- Polyester reinforced PVC
- Excellent kink & abrasion resistance
- Suitable for air & water
- Ideal for window cleaning applications
- Temp -10°C to 60°C
- Premium quality UK manufactured hose

CUOR Series Oil Resistant Suction Hose



Part No.	Length	id	Bar
DSH025	per 1m	1"	9.3
DSH025-30M	30m coil		

- Crush resistant PVC helix reinforced PVC
- Smooth bore - Flexible & kink resistant
- Suitable for oils, diesel, kerosene & white spirit
- For diesel & oil suction applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose

DDH Series Diesel Drop Hose



Part No.	Length	id	Bar
DDH025	per 1m	1"	7
DDH025-50M	50m coil		

- Polyester reinforced nitrile PVC
- Smooth bore - Flexible & kink resistant
- Suitable for oils, diesel, kerosene & white spirit
- For diesel & oil delivery applications
- Temp -10°C to 55°C
- Premium quality UK manufactured hose

HN Series Hi-Viz Microbore Hose



Part No.	Length	id	Bar
503-1103	per 1m	6.3mm	22
503-1103-10M	10m coil		
503-1103-20M	20m coil		
503-1103-50M	50m coil		
503-1103-100M	100m coil		
503-1104	per 1m	8mm	21
503-1104-10M	10m coil		
503-1104-20M	20m coil		
503-1104-50M	50m coil		
503-1104-100M	100m coil		

- Polyester reinforced PVC
- Smooth bore & highly flexible
- Suitable for many liquids, gases & air
- For window cleaning & pneumatic applications
- Temp -10°C to 60°C
- Premium quality UK manufactured hose

Refittex40 Reinforced PVC Hose



Part No.	Length	id	Bar
3208037200	10m coil	8mm	40
3208046600	20m coil	8mm	40
3208102300	50m coil	8mm	40
3208093400	20m coil	10mm	40
3208102400	40m coil	10mm	40

- Textile reinforced PVC
- Suitable for air, water, pesticides & fertilizer.
- For agricultural spraying & pneumatic applications
- Temp -10°C to 50°C @ 20 Bar
- Premium quality Italian manufactured hose

Adblue® Delivery Hose



Part No.	Length	id	Bar
503-1080	per 1m	3/4"	20
503-1080-50M	50m coil		

- 20 Bar max pressure
- 3/4" internal diameter
- Reinforced black EPDM

Drain Jetting Hose

1/4" id - Drain Jetting Hose

1/4" F x 3/8" M fittings

Part No.	Length	Bar	Description	Temp
503-2110	10M	200	DN6 1/4" i.d. thermoplastic hose	70°C
503-2120	20M	200	DN6 1/4" i.d. thermoplastic hose	70°C
503-2130	30M	200	DN6 1/4" i.d. thermoplastic hose	70°C



**35mm
Bend
Radius**

Pratissoli

Sewerjet 280 Drain Jetting Hose Accessories

Part No.	Length	Hose Diameter	Description	Bend Radius
503-2145	40m	3/8" DN10	3/8" BSPF x 3/8" BSPF	60mm
503-2230	40m		ø 3/8" Single Braid 3/8" BSPF x 3/8" BSPM	
503-2231	50m			
503-2232	60m			
503-2233	80m			
503-2234	100m			
503-2240	50m	1/2" DN13	ø 1/2" Double Braid 1/2" BSPF x 1/2" BSPM	90mm
503-2241	60m			
503-2242	80m			
503-2243	100m			
503-2244	120m			
503-2250	50m	3/4" DN19	ø 3/4" Double Braid 3/4" BSPF x 3/4" BSPM	100mm
503-2251	60m			
503-2252	80m			
503-2253	100m			
503-2254	120m			
503-2260	60m	1" DN25	ø 1" Double Braid 1" BSPF x 1" BSPM	130mm
503-2261	80m			
503-2262	100m			
503-2263	120m			
503-2264	150m			
503-2270	60m	1 1/4" DN31	ø 1 1/4" Double Braid 1 1/4" BSPF x 1 1/4" BSPM	200mm
503-2271	80m			
503-2272	100m			
503-2273	120m			
503-2274	150m			



- 280 Bar working pressure, 700 Bar burst pressure
- -30°C to 80°C working temperature
- Abrasion & weather resistant synthetic rubber
- Lowest friction coefficient in its class
- Marked ferrules for easy traceability
- Supplied with Certificate of Conformity

Drain Jetting Nozzles



Page 220-221

Drain Jetting Assemblies



Page 221

High Pressure Hose

5/16" id - Single Wire



1/4" F x M22 F fittings

Part No.	Length	Bar	Description	Temp
TUBIN16	16M	160	5/16" id plastic coated hose	60°C
TUBIN8R	8M	220	5/16" id 1 wire rubber hose	150°C
TUBIN25	25M	210		

3/8" id - Single & Twin Wire



3/8" F x 3/8" M fittings

Part No.	Length	Bar	Description	Temp
HP2600	10M	250	3/8" id 1 wire rubber hose	150°C
HP2600-12.5	12.5M	250		
HP2600-20	20M	250		
HP2600-30	30M	250		
HP2600-40	40M	250		
HP2600-50	50M	250		
HP4800	10M	400	3/8" id 2 wire rubber hose	150°C
HP4800-20	20M	400		
HP4800-30	30M	400		
HP4800-40	40M	400		
HP4800-50	50M	400		



3/8" M x M22 F fittings

Part No.	Length	Bar	Description	Temp
HP2600K	10M	250	3/8" id 1 wire rubber hose	150°C
HP4800K	10M	400	3/8" id 2 wire rubber hose	150°C



3/8" M x 3/8" M fittings

Part No.	Length	Bar	Description	Temp
HP5000MM	10M	500	3/8" id 2 wire rubber hose	155°C



M22 F x M22 F fittings

Part No.	Length	Bar	Description	Temp
HP2600KK	10M	250	3/8" id 1 wire rubber hose	150°C
HP2600KK-20	20M	250		
HP2600KK-25	25M	250		
HP2600KK-30	30M	250		
HP2600KK-40	40M	250		
HP2600KK-50	50M	250		
HP4800KK	10M	400	3/8" id 2 wire rubber hose	150°C
HP4800KK-15	15M	400		
HP4800KK-30	30M	400		



QR x QR fittings


Part No.	Length	Bar	Description	Temp
HP2600QR	10M	250	3/8" id 1 wire rubber hose Compatible with ARS220, ARS350 AR31 QR couplings see P287	150°C
HP2600QR-20	20M	250		
HP2600QR-40	40M	250		
HP2600QR-50	50M	250		
HP4800QR	10M	350	3/8" id 2 wire rubber hose Compatible with ARS220, ARS350 AR31 QR couplings see P287	150°C
HP4800QR-20	20M	350		
HP4800QR-30	30M	350		
HP4800QR-40	40M	350		
HP4800QR-50	50M	350		



High Pressure Hose & Hose Protection

High Pressure Connection Hose

Part No.	Description	Length	Inlet	Outlet	Bar	Temp
BP1	3/8" id 1 wire rubber hose	330mm	3/8" F 90°	3/8" F	210	150°C
BP2		355mm	3/8" F	3/8" F		
503-1043		380mm	3/8" F 90°	3/8" F		
399-1025	3/8" id 2 wire rubber hose	250mm	3/8" F	3/8" F	400	150°C
503-1038		480mm	3/8" F 90°	3/8" F 90°		
503-1039		500mm	3/8" F 90°	3/8" F		
399-1021		590mm	3/8" F 45°	3/8" F		
503-1056		770mm	3/8" F	3/8" F 90°		
503-1025		870mm	3/8" F 45°	3/8" F 90°		
399-1023		1180mm	3/8" F 90°	3/8" F 90°		
503-1022		1730mm	3/8" F 90°	3/8" F 90°		
503-1023		1730mm	3/8" F	3/8" F 90°		

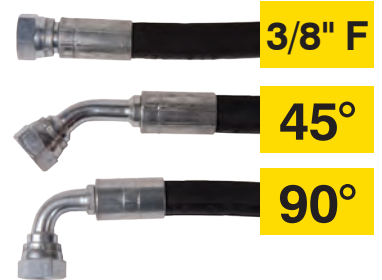

Hose Protection

Spiral Wrap Hose Protector - sold per metre

Part No.
502-1110



- 16.0mm Ø compatible hose diameter
- Black high density polyethylene
- Max complete length = 20m

Hose & Cable Protector



Part No.	Dimensions (mm)
6002200	1000 L x 250 W x 45 H

- Twin channel - up to 1 1/4" od hose
- Inter-locking dovetail connections

Hose Clips & Sealant

Hose Clips - Zinc Plated



Part No.	Adjustment	Band width
502-1000	8 - 12 mm	9mm
502-1001	10 - 16 mm	9mm
502-1003	12 - 22 mm	9mm
502-1004	16 - 27 mm	12mm
502-1005	20 - 32 mm	12mm
502-1006	25 - 40 mm	12mm
502-1007	35 - 50 mm	12mm
502-1008	40 - 60 mm	12mm
502-1009	50 - 70 mm	12mm
502-1010	70 - 90 mm	12mm
502-1011	90 - 110 mm	12mm
502-1012	100 - 120 mm	12mm

- Zinc plated mild steel worm drive to BS5315 (W1)

Hose Clips - Stainless Steel



Part No.	Adjustment	Band width
502-1020	8 - 16 mm	9mm
502-1021	12 - 20 mm	9mm
502-1022	16 - 25 mm	9mm
502-1023	20 - 32 mm	12mm
502-1024	25 - 40 mm	12mm
502-1025	35 - 50 mm	12mm
502-1026	40 - 60 mm	12mm
502-1027	50 - 70 mm	12mm
502-1028	60 - 80 mm	12mm
502-1029	70 - 90 mm	12mm
502-1030	90 - 110 mm	12mm
502-1031	100 - 120 mm	12mm

- AISI 430 S/Steel band & screw (W3)

Hose Clips - Stainless Steel



Part No.	Adjustment
502-1060	43 - 47 mm
502-1061	47 - 51 mm
502-1063	51 - 55 mm
502-1072	55 - 59 mm
502-1064	59 - 63 mm
502-1065	63 - 68 mm
502-1066	68 - 73 mm
502-1067	73 - 79 mm
502-1071	79 - 85 mm
502-1068	85 - 91 mm
502-1069	91 - 97 mm
502-1070	104 - 112 mm

- AISI 430 S/Steel band
- Designed for 360° clamping
- High torque applications
- Nylon lock feature

O Clips - Zinc Plated



Part No.	Size
502-1100	11 - 13mm
502-1101	15 - 18mm
502-1104	20 - 23mm
502-1102	23 - 27mm

- Zinc plated mild steel

O Clip Pliers



Part No.
800-1005

Teflon® Tape



Part No.	Length	Width
9902-1252	13.2m	12mm