Trigger Guns & Accessories	158 - 159
Single & Twin Lances	160 - 161
Lance Extensions	162 - 163
Trigger Guns with Extensions	164
High Pressure Spray & Wash Guns	164
Gun & Lance Assemblies	165 - 168
Interpump Pressure Wash Accessories	168 - 170
Extending Lances	171
Nozzle Holders & Lance Accessories	171
Rotary & Adjustable Nozzle Heads	172 - 173
Sandblasting Heads	174
Drain Cleaning Heads	175
High Pressure Nozzles	176 - 177
Foam Heads & Injectors	178
Spray & Wash Guns	179 - 181
Unloader Valves	182 - 184
Controlsets	184 - 185
Flow Sensitive Unloader Valves	186
Pressure Regulating Valves	187 - 189
Safety Relief Valves	190 - 191
Pneumatic Valves	192 - 193
Foot Operated On-Off Valves	193
Chemical Injectors & Metering Valves	194
Chemical Filters & Water Tanks	195
Pulsation Dampeners	196
Pressure Switches & Pump Thermal Protectors	196
Engine Speed Controllers	197
Inlet & Suction Filters	197 - 198
Burners & Accessories	199 - 200

Available from B&G Cleaning Systems
Call 0808 163 7983

Trigger Guns

RL60 Foam Gun

Part No.	Inlet
30.3170.00	1/2" BSPF swivel

- Max press 60 Bar
- Max flow 60 Lpm
- 1/2" BSPF outlet
- Max temp 100°C
- Suitable for food industry

RL16 Wash Gun

Part No.	Inlet
30.0000.00	3/8" BSPF

- Max press 160 Bar
- Max flow 30 Lpm
- Outlet 1/4" BSPF
- Max temp 100°C

RL20 Wash Gun

Part No.	Inlet
30.0100.20	1/4" BSPF
30.0100.00	3/8" BSPF

- Max press 200 Bar
- Max flow 30 Lpm
- 1/4" BSPF outlet
- Max temp 160°C

Vega Stainless Steel

Part No.	Inlet
30.3150.00	3/8" BSPF

- Max press 250 Bar
- Max flow 40 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C

AL19 Wash Guns

Part No.	Inlet
433402	3/8" BSPF
433404	3/8" BSPF Swivel

- Max press 280 Bar
- Max flow 30 Lpm
- Outlet 1/4" BSPF
- Max temp 150°C

MV925 Wash Gun

Part No.	Inlet
4012205000	3/8" BSPF
4012205001	M22M
4012305000	3/8" BSPF Swivel
4012305001	M22M Swivel

- Max press 280 Bar
- Max flow 30 Lpm
- 1/4" BSPF outlet
- Max temp 160°C

Vega Wash Guns

Part No.	Inlet
30.2000.00	3/8" BSPF
30.2030.00	3/8" BSPF Swivel

- Max press 310 Bar
- Max flow 40 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C

RL30 Wash Guns

Part No.	Inlet
30.2500.00	3/8" BSPF
30.2500.20	M22 M

- Max press 310 Bar
- Max flow 40 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C

Vega Weeping Gun

Part No.	Inlet
30.2580.05	3/8" BSPF

- Max press 310 Bar
- Max flow 40 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C

Linear 3 Wash Gun

Part No.	Inlet
30.0620.00	3/8" BSPF

- Max press 310 Bar
- Max flow 40 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C

AL36 Wash Gun

Part No.	Inlet
4018000048	3/8" BSPF
4018000049	3/8" BSPF Swivel

- Max press 310 Bar
- Max flow 45 Lpm
- 1/4" BSPF outlet
- Max temp 160°C

MV2012 Wash Gun

Part No.	Inlet
4012203005	3/8" BSPF
4012203007	M22M
4012303008	3/8" BSPF Swivel

- Max press 310 Bar
- Max flow 40 Lpm
- 1/4" BSPF outlet
- Max temp 160°C

RL57 Wash Gun

Part No.	Inlet
30.4700.00	3/8" BSPF

- Max press 500 Bar
- Max flow 28 Lpm
- Outlet 1/4" BSPF
- Max temp 160°C
- AISI 303 stainless steel

RL84 Wash Gun

Part No.	Inlet
30.5400.00	1/2" BSPF

- Max press 500 Bar
- Max flow 80 Lpm
- Outlet 1/2" BSPF
- Max temp 100°C

RL600 Wash Gun

Part No.	Inlet
30.5800.00	3/8" BSPF

- Max press 600 Bar
- Max flow 60 Lpm
- Outlet 3/8" BSPF
- Max temp 100°C

RL204 Wash Gun

Part No.	Inlet
30.5200.00	3/4" BSPF

- Max press 200 Bar
- Max flow 200 Lpm
- Outlet 1/2" BSPF
- Max temp 100°C

Shoulder Extension

Part No.	Description
30.5019.21	Fits RL80
30.5060.00	Fits RL84/RL204/RL600

- 300mm extension

RL Extension Lance

Part No.	Size
30.5000.40	400 mm
30.5000.80	800 mm

- Extension lance for RL84/RL204 gun
- 1/2" BSPM inlet x 1/4" BSPF outlet
- Adjustable sliding side handle
- Max press 500 Bar

Variable Pressure Regulators & Lance Couplings

VP2 Variable Pressure Regulator

Part No.
4130100001

- Max press 250 Bar
- 30 Lpm max flow
- 160°C max water temperature
- 1/4" BSPM inlet
- 1/4" BSPF outlet
- Fits inline between gun & lance
- Use with trapped pressure unloader
- Brass and plastic construction

Use with trapped pressure unloader or regulator

Variable Pressure Regulator

Part No.
VARIOPRESS

- Max press 200 Bar
- Max flow 21 Lpm
- Max temp 80°C
- 1/4" BSPM inlet
- 1/4" BSPF outlet
- Brass and plastic construction
- Rotating unit regulates the pressure
- Fits inline between gun & lance

Use with trapped pressure unloader or regulator

AR4 Lance Coupling

Part No.
4101202009

- Max press 220 Bar
- Max flow 45 Lpm
- Inlet 1/4" BSPM x QRC
- Max temp 150°C
- Brass & nylon
- Viton seals

AR4 Lance Nipple

Part No.
0121720120

- Max press 220 Bar
- Max flow 45 Lpm
- Outlet 1/4" BSPF
- Max temp 150°C

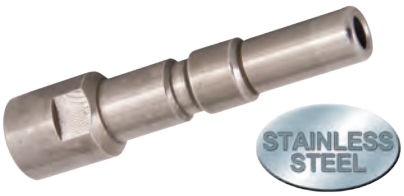

Bayonet Coupling

Part No.
26.0605.00

- Max press 120 Bar
- Max flow 30 Lpm
- Inlet 1/4" BSPF
- Max temp 90°C
- Brass construction
- 14mm pin

Single Lances

Car Wash Lance - Stainless Steel



- Max pressure 250 Bar
- Max flow 45 Lpm
- Max temp 160°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
4152000002	700 mm	1

SF12 Lance - Moulded Grip - Zinc Plated & Stainless Steel

- Max pressure 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
392903	400 mm	1
392905	700 mm	1
392906	900 mm	1
392907	1200 mm	2
392908	1500 mm	2
392909	1700 mm	2
392910	2000 mm	2
393003	900 mm	1

SF12 Lance - Moulded Grip - Zinc Plated

- Max pressure 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- 1/4" BSPM inlet
- 1/4" BSPM outlet

Part No.	Length	Grips
392913	700 mm	1
392914	900 mm	1

SF12 Lance - Moulded Grip - Zinc Plated



- Max pressure 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
390121	500 mm	1
390122	700 mm	1
390123	900 mm	1
390124	1200 mm	2
390125	1500 mm	2
390126	1700 mm	2
390127	2000 mm	2

SC5 Lance - Vented Grip - Zinc Plated

- Max pressure 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
390006	700 mm	1
390007	900 mm	1
390008	1200 mm	2
390009	1500 mm	2
390010	1700 mm	2
390011	2000 mm	2

SF12 Lance - Moulded Grip - Stainless Steel

- Max pressure 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
390515	900 mm	1
390516	1200 mm	2
390517	1500 mm	2

S3 Lance - Vented Grip - Stainless Steel

- Max pressure 500 Bar
- Max flow 28 Lpm
- Max temp 160°C
- 1/4" BSPM inlet
- 1/4" NPTF outlet
- Supplied with nozzle protector

Part No.	Length	Grips
40.0240.00	1200 mm	2

RL600 Lance - Vented Grip - Stainless Steel

Part No.	Length
40.0160.80	800 mm
40.0160.12	1200 mm
3/8" BSPM In x 1/4" NPTF Out	

- Max pressure 600 Bar
- Max flow 60 Lpm
- Max temp 100°C

600 Bar

STAINLESS STEEL

Twin Lances - Hi-Lo Pressure Adjustable

Rubber Grip - Zinc Plated - Side Control Valve

Part No.	Length
ZZZ	1000 mm
1/4" BSPM Inlet x 1/4" NPTF Nozzle Holders	

- Max press 200 Bar
- Max flow 40 Lpm
- Max temp 140°C

High pressure

Low pressure

Moulded Grip - Stainless Steel - Top Control Valve

STAINLESS STEEL

Part No.	Length
391805	900 mm
1/4" BSPM Inlet x 1/4" NPTF Nozzle Holders	

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 150°C

High pressure

Low pressure

Moulded Grip - Zinc Plated - Top Control Valve

Part No.	Length
41.0330.00	850 mm
1/4" BSPM Inlet x 1/4" NPTF Nozzle Holders	

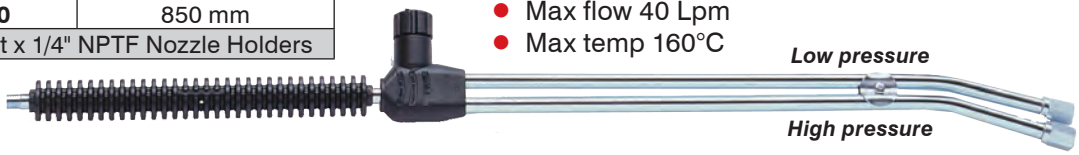

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C

Low pressure

High pressure

Vented Grip - Zinc Plated - Side Control Valve

Part No.	Length
391503	1100 mm
1/4" BSPM Inlet x 1/4" NPTF Nozzle Holders	

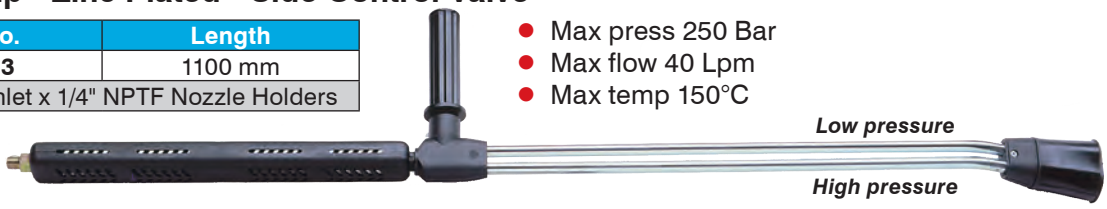

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 150°C

Low pressure

High pressure

Double Vented Grip - Zinc Plated - Side Control Valve

Part No.	Length
391508	1000 mm
1/4" BSPM Inlet x 1/4" NPTF Nozzle Holders	

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 150°C

Low pressure

High pressure

Vented Grip - Zinc Plated - Side Control Valve

Part No.	Length
12.0260	1060 mm
1/4" BSPM inlet x 1/4" NPTF nozzle holders	

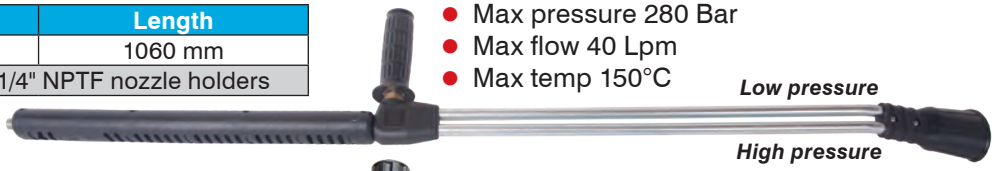

- Max pressure 280 Bar
- Max flow 40 Lpm
- Max temp 150°C

Low pressure

High pressure

Extension - S/Steel - Side Control Valve

Part No.	Length
392203	660 mm
M22 M inlet x 2 x 1/4" NPTF outlet	

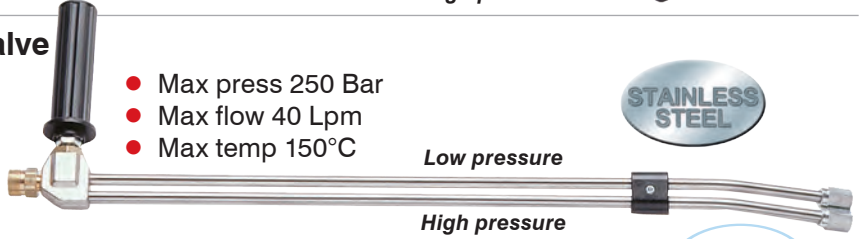

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 150°C

STAINLESS STEEL

Low pressure

High pressure

Pressure Wash Lance Extensions

Lance Extensions

Hi-Lo Pressure Head - 300mm

Part No.	Inlet	Description
470801	M22 M	Hi/Lo pressure 1/4" NPTF

- Max press 220 Bar
- Max flow 30 Lpm
- Max temp 150°C

Variable Angle - Hi-Lo - 370 mm

Part No.	Inlet	Outlet	Jet
472302130	M22 M	Vari head	1.3
472302140	M22 M	Vari head	1.4
ART236	M22 M	Vari head	1.5

- Max press 150 Bar
- Max flow 21 Lpm
- Max temp 60°C

Zinc Plated - Variable Angle Head - 600 mm

Part No.	Description	Inlet	Jet
4723.58.150	Variable angle - Hi-Lo press	M22 M	1.5

- Max press 220 Bar
- Max flow 21 Lpm
- Max temp 60°C

350mm Extension with Multireg Head

Part No.	Description
REGKIT 1.5	Variable angle - Hi-Lo press 1.5 Jet - M22 M coupling

- Max press 250 Bar
- Max flow 21 Lpm
- Max temp 60°C

350mm Extension with Rototek Head

Part No.	Description
ROTOTEKKIT 1.5	Rotary nozzle - Hi-Lo press 1.5 Jet - M22 M coupling

- Max press 250 Bar
- Max flow 21 Lpm
- Max temp 60°C

Zinc Plated Tube - 500 mm

Part No.	Inlet	Outlet
432204	1/4" BSPM	1/4" NPTF

- Max press 320 Bar
- Max flow 30 Lpm
- Max temp 150°C

Zinc Plated Tube - 700 mm

Part No.	Inlet	Outlet
432202	M22 M	1/4" NPTF

- Max press 320 Bar
- Max flow 30 Lpm
- Max temp 150°C

Foam Head - 530 mm

Part No.	Inlet	Description
TXFOAMKIT1	M22 M	50 CL bottle

- Max press 200 Bar
- Max flow 17 Lpm
- Max temp 60°C

Zinc Plated - Vented Grip - 380mm

Part No.	Inlet	Outlet
40.0370.00	1/4" BSPM	1/4" BSPF

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C

Lance Extensions

350mm Extension

Part No.	Inlet	Outlet
FIX35	M22 F	1/4" BSPM

- Max press 250 Bar
- Max flow 31 Lpm
- Max temp 150°C

350mm Extension

Part No.	Inlet	Outlet
QUICK35	M22 M	1/4" BSPM

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 60°C

90° Underbody Lance Extension

Part No.	Length	Inlet	Outlet
40.5191.00	900 mm	M22 M	1/4" BSPF

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C

Zinc Plated Lance Tube

Part No.	Threads	mm
40.5050.66	1/4" BSPM	300
40.5055.66	1/4" BSPM	500
40.5702.66	1/4" BSPM	700
40.5902.66	1/4" BSPM	900

- Max press 250 Bar - Max flow 40 Lpm
- Max temp 160°C

Stainless Steel Lance Tube



Part No.	Threads	mm
41.0501.56	1/4" BSPM	300
40.0503.56	1/4" BSPM	500
40.7711.56	1/4" BSPM	700
40.9011.56	1/4" BSPM	900

- Max press 250 Bar - Max flow 40 Lpm
- Max temp 160°C

U-Bend Lance Extension

Part No.
9918-4817

- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C
- 1/4" BSP Male threads

U-Bend Extension

Part No.
209-1004

- Max press 250 Bar
- QR adaptor inlet
- QR coupler outlet
- Zinc plated tube - 300mm
- Plated steel Be QR adaptor
- Brass BE QR coupler

U-Bend Lance Extension

Part No.
85.400.033

- Max press 250 Bar
- M22 male inlet
- QR coupler outlet
- 300mm tube
- For extending lance
- For BE QR adaptors/nozzles

Flexible Tube - 390mm

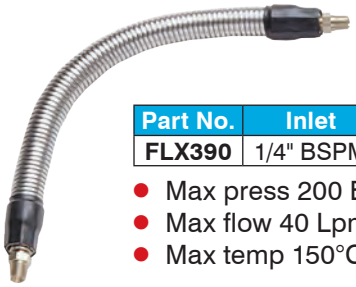

Part No.	Inlet	Outlet
FLX390	1/4" BSPM	1/4" BSPM

- Max press 200 Bar
- Max flow 40 Lpm
- Max temp 150°C

Side Grip for S3 lance

Part No.
41.0795.00

- Screws in to side of S3 grip
- See page 160 for lance

Trigger Guns with Extensions

Trigger Guns with Extensions

RL16 with 320mm Extension

Part No.	Inlet	Outlet
30.0260.00	1/4" BSPF	M22 F

- Max press 160 Bar
- Max flow 30 Lpm
- Max temp 100°C

BIT105 Wash Gun with 300mm Extension

Part No.	Inlet	Outlet
4020003011	1/4" BSPM	M22 F
4020003013	M22 M	M22 F

- Max press 186 Bar
- Max flow 30 Lpm
- Max temp 60°C

AL13 Wash Gun with 300mm Extension

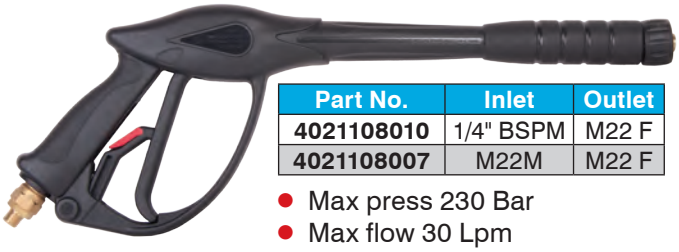

Part No.	Inlet	Outlet
4021108010	1/4" BSPM	M22 F
4021108007	M22M	M22 F

- Max press 230 Bar
- Max flow 30 Lpm
- Max temp 60°C

AL19 with 320mm Extension

Part No.	Inlet	Outlet
433509	M22 M	M22 F

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 150°C

MV925 Wash Gun with 350mm Extension

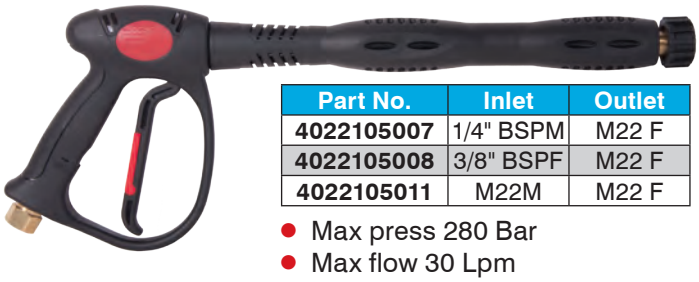

Part No.	Inlet	Outlet
4022105007	1/4" BSPM	M22 F
4022105008	3/8" BSPF	M22 F
4022105011	M22M	M22 F

- Max press 280 Bar
- Max flow 30 Lpm
- Max temp 160°C

RL300 Gun with 400mm Extension

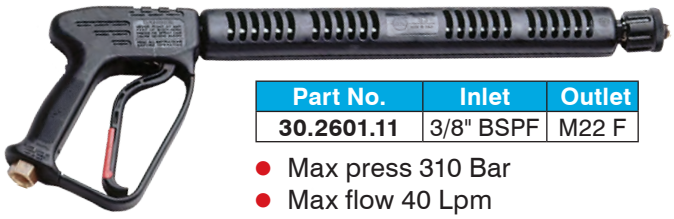

Part No.	Inlet	Outlet
30.2601.11	3/8" BSPF	M22 F

- Max press 310 Bar
- Max flow 40 Lpm
- Max temp 160°C

High Pressure Spray & Wash Guns

From straight to cone by operating the central regulator handle

Wash Lance with Adjustable Spray Pattern

Part No.	Max Press	Max Flow	Inlet	Nozzle
22.901.161	250 Bar	30 Lpm	1/2" BSPM	1.5mm

- S/Steel tube
- Brass & S/Steel internals
- Thermoplastic rubber protectors
- 720mm long
- Max temp 60°C
- Max nozzle size 2.3mm

AL55 Wash Lance with Adjustable Spray Pattern

Part No.	Max Press	Max Flow	Inlet	Outlet
4022409000	220 Bar	45 Lpm	3/8" BSPF	M15 x 1F

- S/Steel tube
- Brass & S/Steel internals
- Thermoplastic rubber protectors
- 750mm long
- Max temp 90°C
- Nozzle not included

Spray & Wash Gun Nozzles



Page 176

Gun & Lance Assemblies

400mm Lance - RL16 Trigger - Fixed Nozzle

Part No.	Inlet	Nozzle Size
MINIGUN	3/8" BSPF	No nozzle

- Max press 160 Bar
- Max flow 30 Lpm
- Max temp 100°C

400mm Lance - P4 Trigger - Variable Angle Hi-Lo Nozzle Head

Part No.	Inlet	Nozzle Size
ART3701.04.050	1/4" BSPM	1.5 (05)

- Max press 207 Bar
- Max flow 21 Lpm
- Max temp 60°C

900mm Lance - MV925 Trigger - Fixed Nozzle

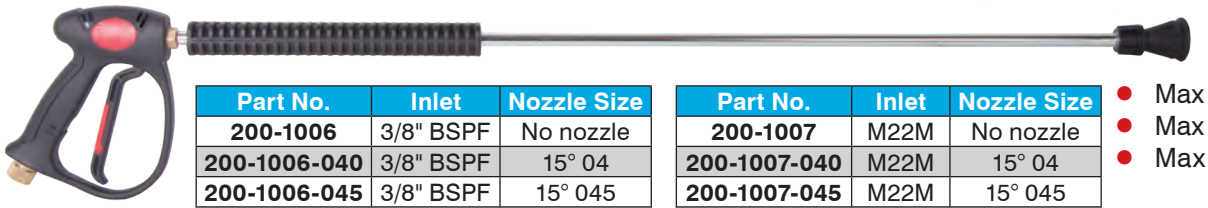

Part No.	Inlet	Nozzle Size
200-1006	3/8" BSPF	No nozzle
200-1006-040	3/8" BSPF	15° 04
200-1006-045	3/8" BSPF	15° 045
200-1006-050	3/8" BSPF	15° 05
200-1006-055	3/8" BSPF	15° 055
200-1006-060	3/8" BSPF	15° 06
200-1006-070	3/8" BSPF	15° 07
200-1006-100	3/8" BSPF	15° 10

Part No.	Inlet	Nozzle Size
200-1007	M22M	No nozzle
200-1007-040	M22M	15° 04
200-1007-045	M22M	15° 045
200-1007-050	M22M	15° 05
200-1007-055	M22M	15° 055
200-1007-060	M22M	15° 06
200-1007-070	M22M	15° 07
200-1007-100	M22M	15° 10

- Max press 280 Bar
- Max flow 30 Lpm
- Max temp 150°C

900mm Lance - MV925 Trigger - Hi-Lo Pressure Head

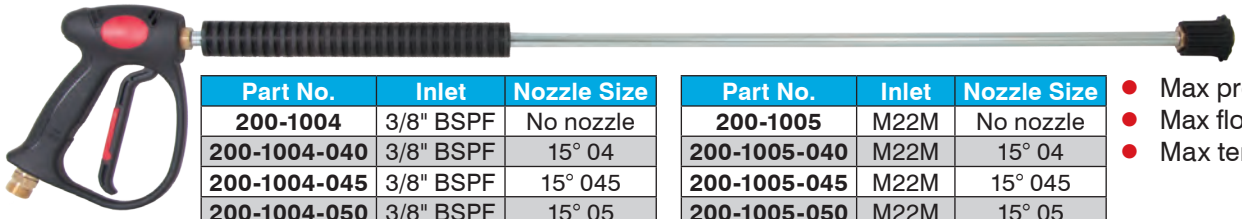

Part No.	Inlet	Nozzle Size
200-1004	3/8" BSPF	No nozzle
200-1004-040	3/8" BSPF	15° 04
200-1004-045	3/8" BSPF	15° 045
200-1004-050	3/8" BSPF	15° 05
200-1004-055	3/8" BSPF	15° 055
200-1004-060	3/8" BSPF	15° 06
200-1004-070	3/8" BSPF	15° 07

Part No.	Inlet	Nozzle Size
200-1005	M22M	No nozzle
200-1005-040	M22M	15° 04
200-1005-045	M22M	15° 045
200-1005-050	M22M	15° 05
200-1005-055	M22M	15° 055
200-1005-060	M22M	15° 06
200-1005-070	M22M	15° 07

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 150°C

900mm Lance - MV925 Trigger - BE Quick Release Outlet

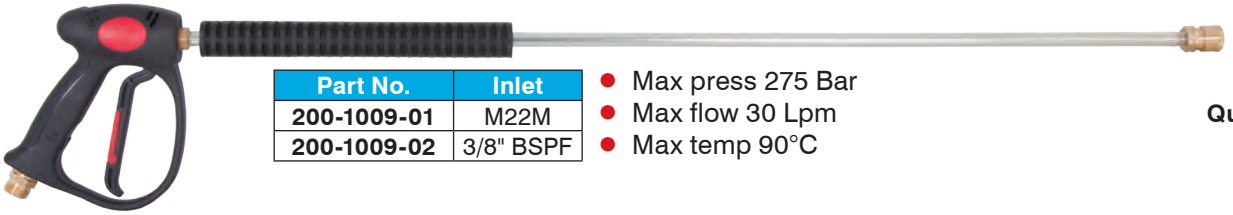

Part No.	Inlet
200-1009-01	M22M
200-1009-02	3/8" BSPF

- Max press 275 Bar
- Max flow 30 Lpm
- Max temp 90°C

Quick Connect Nozzles See Page 176

900mm Lance - Vega Trigger with Swivel - Fixed Nozzle

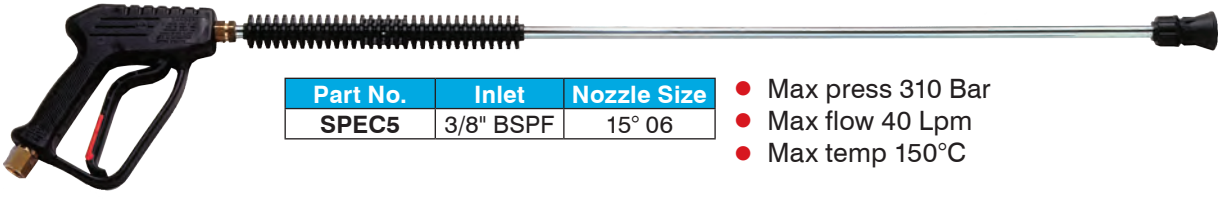

Swivel Inlet

Part No.	Inlet	Nozzle Size
SPEC5	3/8" BSPF	15° 06

- Max press 310 Bar
- Max flow 40 Lpm
- Max temp 150°C

Gun & Lance Assemblies

900mm Vented Lance - RL30 Trigger - Fixed Nozzle

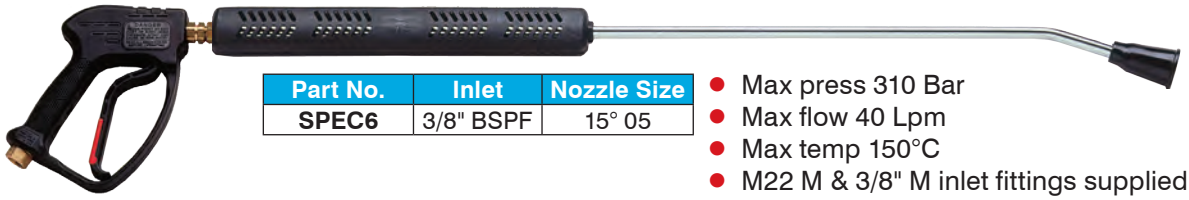

Part No.	Inlet	Nozzle Size
SPEC6	3/8" BSPF	15° 05

- Max press 310 Bar
- Max flow 40 Lpm
- Max temp 150°C
- M22 M & 3/8" M inlet fittings supplied

1200mm Vented Lance - RL57 Trigger - Fixed Nozzle

Part No.	Inlet	Nozzle Size
30.4732.00	3/8" BSPF	No nozzle
200-1030	3/8" BSPF	15° 03
200-1031	3/8" BSPF	15° 037
200-1029	3/8" BSPF	15° 04
200-1027	3/8" BSPF	15° 05

- Max press 500 Bar
- Max flow 28 Lpm
- Max temp 160°C

650mm Split Lance - MV925 Trigger - Hi-Lo Pressure Head

Part No.	Inlet	Nozzle Size
SPEC22	M22 M	15° 05

- Max press 220 Bar
- Max flow 30 Lpm
- Max temp 150°C

550mm Split Lance - BIT105 Trigger - Variable Angle Hi-Lo Nozzle Head

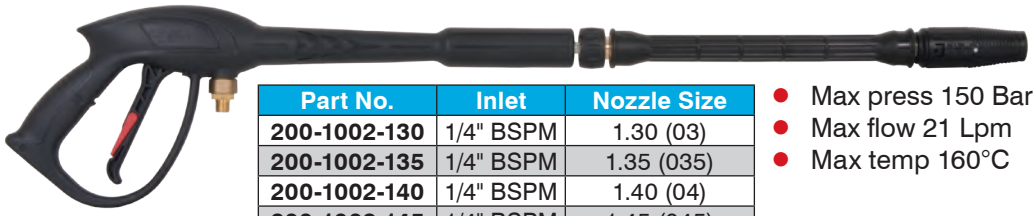

Part No.	Inlet	Nozzle Size
200-1002-130	1/4" BSPM	1.30 (03)
200-1002-135	1/4" BSPM	1.35 (035)
200-1002-140	1/4" BSPM	1.40 (04)
200-1002-145	1/4" BSPM	1.45 (045)
200-1002-150	1/4" BSPM	1.50 (05)

- Max press 150 Bar
- Max flow 21 Lpm
- Max temp 160°C

700mm Lance - AL-P4 Trigger - Twin Nozzle Head

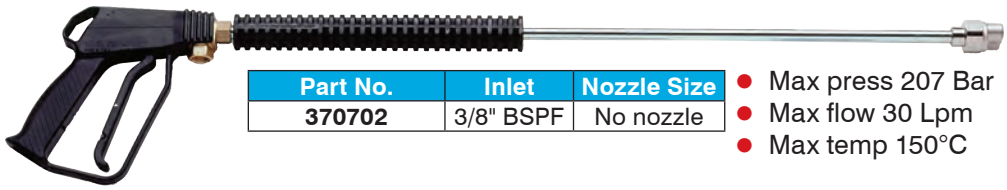

Part No.	Inlet	Nozzle Size
370702	3/8" BSPF	No nozzle

- Max press 207 Bar
- Max flow 30 Lpm
- Max temp 150°C

900mm Twin Split Lance - MV925 Gun - Twin Nozzle Head

Part No.	Inlet	Nozzle Size
200-1014	M22 M	15° 02
200-1012	M22 M	15° 04
200-1015	M22 M	15° 045
200-1013	M22 M	15° 05

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 150°C
- 40° chemical nozzle

110mm Twin Lance - MV925 Trigger - Twin Nozzle Head

Part No.	Inlet	Nozzle Size
SPEC14	M22 M	No HP Nozzle

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 150°C

Chemical nozzle fitted, high pressure nozzle supplied separately (see page 177)

700mm Lance - MV925 Trigger - UR25 Rotary Head

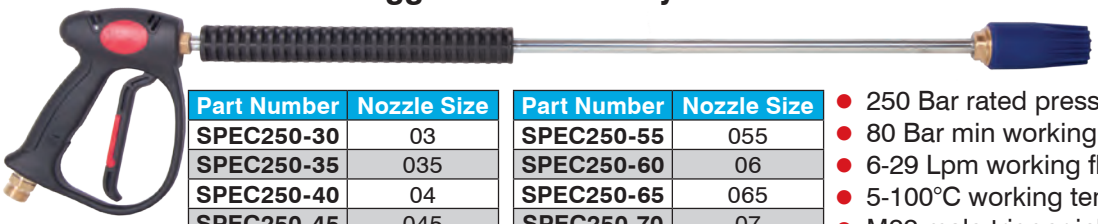

Part Number	Nozzle Size	Part Number	Nozzle Size
SPEC250-30	03	SPEC250-55	055
SPEC250-35	035	SPEC250-60	06
SPEC250-40	04	SPEC250-65	065
SPEC250-45	045	SPEC250-70	07
SPEC250-50	05	SPEC250-80	08

- 250 Bar rated pressure
- 80 Bar min working pressure
- 6-29 Lpm working flow
- 5-100°C working temperature
- M22 male trigger inlet

700mm Lance - RL30 Trigger - UR32 Rotary Head

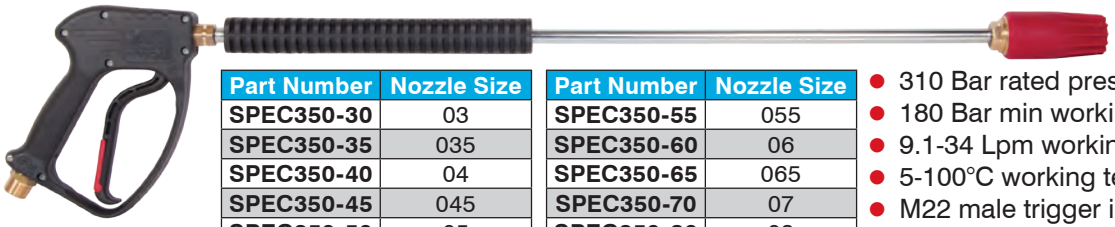

Part Number	Nozzle Size	Part Number	Nozzle Size
SPEC350-30	03	SPEC350-55	055
SPEC350-35	035	SPEC350-60	06
SPEC350-40	04	SPEC350-65	065
SPEC350-45	045	SPEC350-70	07
SPEC350-50	05	SPEC350-80	08

- 310 Bar rated pressure
- 180 Bar min working pressure
- 9.1-34 Lpm working flow
- 5-100°C working temperature
- M22 male trigger inlet

Gun & Lance Assemblies

1200mm Vented Lance - RL57 Trigger - UR32 Rotary Head

Part No.	Inlet	Nozzle Size
200-1028	3/8" BSPF	05

- 350 Bar rated pressure
- 180 Bar min working pressure
- 9.1-34 Lpm working flow
- 5-100°C working temperature

1200mm Vented Lance - RL57 Trigger - UR60 Rotary Head

Part No.	Nozzle Size
SPEC500-20	02
SPEC500-30	03
SPEC500-35	035
SPEC500-40	04
SPEC500-50	05

Part No.	Nozzle Size
SPEC500-60	06
SPEC500-65	065
SPEC500-70	07
SPEC500-80	08

- 500 Bar rated pressure
- 180 Bar min working pressure
- 6.2-44.6 Lpm working flow
- 90°C working temperature
- 3/8" BSPF trigger inlet

STAINLESS STEEL

Turbo Nozzle Lance Extensions - 250 Bar

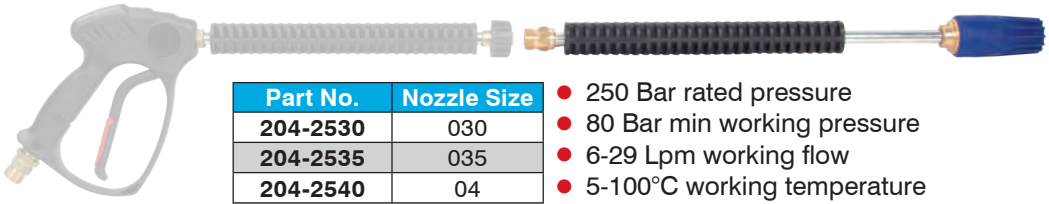

Trigger Assembly not included see page 164

Part No.	Nozzle Size
204-2530	030
204-2535	035
204-2540	04
204-2545	045
204-2550	05
204-2555	055
204-2560	060
204-2565	065
204-2570	070
204-2580	080

- 250 Bar rated pressure
- 80 Bar min working pressure
- 6-29 Lpm working flow
- 5-100°C working temperature
- M22 male inlet
- 400mm extension lance
- Zinc plated lance with moulded grip

Interpump TX & TSX Lance Assemblies

TX & TSX Lance Assembly with Multireg Head

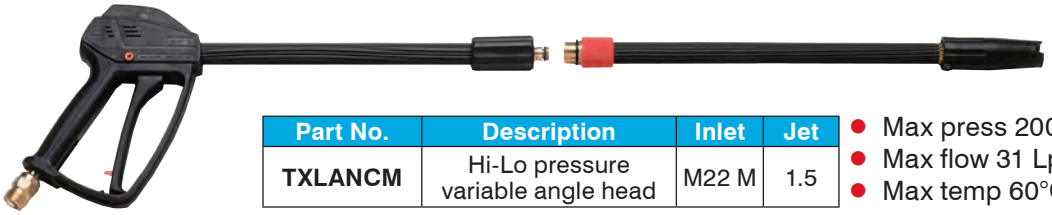

Part No.	Description	Inlet	Jet
TXLANCM	Hi-Lo pressure variable angle head	M22 M	1.5

- Max press 200 Bar
- Max flow 31 Lpm
- Max temp 60°C

TX & TSX Lance Assembly with Rototek Head

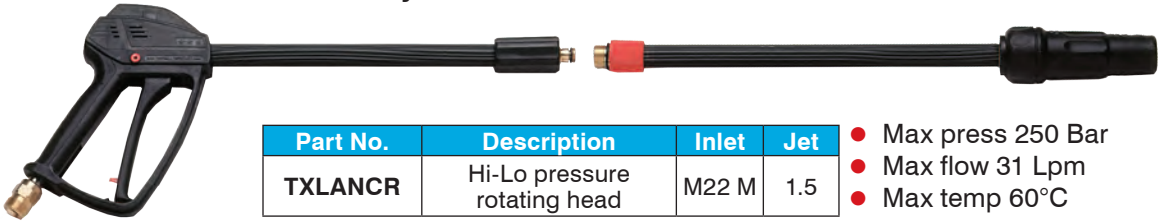

Part No.	Description	Inlet	Jet
TXLANCR	Hi-Lo pressure rotating head	M22 M	1.5

- Max press 250 Bar
- Max flow 31 Lpm
- Max temp 60°C

Interpump Boxjet & Quicky Lance & Lance Accessories

Complete Lance Assembly

Part No.	Description	Inlet	Jet
BOXJETGUN	Hi-Lo pressure variable angle head	1/4" BSPM	1.4

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Extension with Bent End - 770 mm

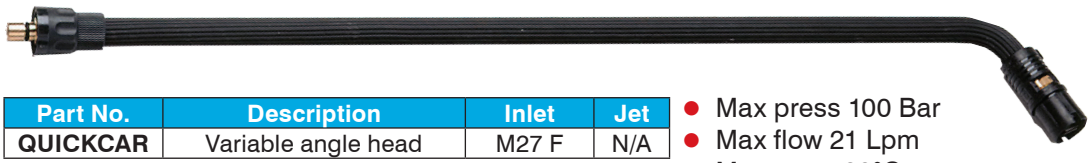

Part No.	Description	Inlet	Jet
QUICKCAR	Variable angle head	M27 F	N/A

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Extension Lances

Part No.	Length	Inlet	Outlet
QUICK2	220mm	M27 F	1/4" BSPM
QUICK4	350mm	M27 F	1/4" BSPM
QUICK5	500mm	M27 F	1/4" BSPM
QUICK7	750mm	M27 F	1/4" BSPM

- Max press 100 Bar
- Max flow 40 Lpm
- Max temp 60°C

Extension with Multireg Head - 400 mm

Part No.	Description	Inlet	Jet
REGKIT 1.4	Hi-Lo pressure variable angle head	M27 F	1.4

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Extension with Variojet Head - 400 mm

Part No.	Description	Inlet	Jet
VARIOKIT 1.4	Variable angle head	M27 F	1.4

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Extension with Foamkit - 410 mm

Part No.	Description	Inlet	Jet
FOAMKIT1	Hi-Lo pressure variable angle head	M27 F	N/A

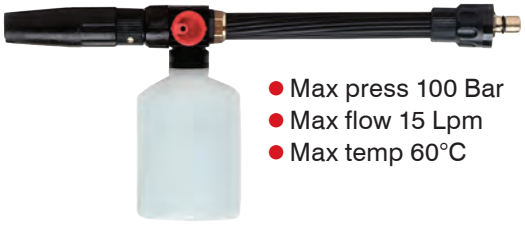

- Max press 100 Bar
- Max flow 15 Lpm
- Max temp 60°C

Extension with Rotoclean Head - 300 mm

Part No.	Description	Inlet	Jet
ROTINKIT 1.4	Rotating head	M27 F	1.4

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

350mm Extension

Part No.	Description	Inlet	Outlet
FIXUP	M27 extension lance	1/4" BSPM	M27 M

- Max press 100 Bar
- Max flow 15 Lpm
- Max temp 60°C

Gun & Lance Assemblies

Interpump Cleanmatic Lance & Lance Accessories

Chemical Bottle

Part No.	Description
SINCHEM	Clips on variojet end

- Adjustable chemical rate
- 50 cl bottle

Trigger & Hose Assembly

Part No.
P6T7

- 8 metre hose
- Max press 100 Bar
- Max flow 12 Lpm
- Max temp 100°C

Extension with Rotin Head - 300 mm

Part No.	Description	Inlet	Jet
ROTINKIT1.35	Rotating head	M27 F	1.35

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Extension with Variojet Head - 400 mm

Part No.	Description	Inlet	Jet
VARIOKIT1.35	Variable angle head	M27 F	1.35

- Max press 100 Bar
- Max flow 21 Lpm
- Max temp 60°C

Cleanmatic, Boxjet, Quicky, IP, TX & TSX Accessory Kits

Sand Blast Kits

Part No.	Max Bar	Max Lpm	Description
SANDKIT1	100	30	Sand blast kit for Cleanmatic, Boxjet & Quicky - hose length 3.5m
TXSANDKIT1	250	50	Sand blast kit for IP, TX & TSX hose length 3.5m

TX Sand kit is fitted with a standard M22 M connector

Drain Kit

Part No.	Max Bar	Max Lpm	Max Temp	Length	Description
DRAINKIT	110	11	60°C	10M	Drain kit for Cleanmatic, Boxjet & Quicky
TXDRAINKIT1	200	15	60°C	10M	Drain cleaning kit for IP, TX & TSX

TX Drain kit is fitted with a standard M22 M connector

Extending Lance

Part No.	Extended	Closed	Kg
85.205.012	3.6 metres	2 metres	3.8
85.205.018	5.4 metres	2 metres	3.8
85.205.024	7.3 metres	2.6 metres	4.4

- 275 Bar max pressure
- 30 Lpm max flow
- 90°C max temperature
- Fibreglass & aluminium construction
- Removeable M22 extension
- High pressure gun - M22M inlet
- 1/4" female nozzle holder
- BE QR fittings included

Not fitted with nozzle, see page 176 & 177

Optional Belt Kit

Part No.
85.400.019

- With clamps to secure lance

Gutter Cleaning Kit

Part No.
209-1002

- Zinc plated U-bend with tee
- For extending lance
- Inlets included - 1/4"BSPM/M22/QR
- 2 x 1/4"BSPF outlets
- 300mm tube
- High pressure nozzles NOT included see page 176 & 177

Nozzle Holders & Lance Accessories

Nozzle Protector for Single Lance

Part No.	Fits
18.0027.51	1/4" tube

Nozzle Protector for Double Lance

Part No.	Fits
41.0422.24	1/4" tube

Nozzle Protector for Single Lance

Part No.	Fits
40.0020.00	1/4" tube

- Two part threaded protector

Nozzle Holders

Part No.	Description
40.0007.61	1/4" BSPF x 1/4" NPTF
94.5130.00	1/4" BSPF x 1/8" NPTF

High Volume Venturi Suction Head

Part No.
0213000640

Not supplied with suction or high pressure hose

- M22 M inlet
- Max pressure 250 Bar
- Max temperature 150°C
- Moulded rubber suction head
- 1 1/2" Ø hose barb outlet
- Can be used with most pressure washers
- Ideal for flooded areas
- Supplied with 0° 060 nozzle

Venturi Sludge Extractor Head

Part No.
28.0750.44

- 250 Bar rated pressure
- 25 Lpm max flow
- 90°C max temp
- Cast metal construction
- 3/8" BSPF inlet
- 1 1/4" BSPF outlet
- 1/4" NPTF nozzle port
- NEEDS 0° HIGH PRESSURE NOZZLE

Rotating Nozzle Heads

Rotoclean Rotating Nozzle - 100 Bar

Part No.	Lpm	Jet
ROTIN	13	1.4

- Max temp 60°C
- 1/4" BSPF inlet
- Fixed pressure

UR 20 Rotating Nozzle - 200 Bar

Part No.	Jet
25.1720.35	035
25.1720.40	04
25.1720.45	045
25.1720.50	05
25.1720.55	055
25.1720.65	065

- Max temp 90°C
- 1/4" BSPF inlet
- Fixed pressure

Rotomax Rotating Nozzle - 250 Bar

Part No.	Lpm	Jet
ROTOMAX1.5	21	1.5

- Max temp 80°C
- 1/4" BSPF inlet
- Fixed pressure

Rototek Rotating Nozzle - 250 Bar

Part No.	Lpm	Jet
ROTOTEK1.5	21	1.5

- Max temp 60°C
- 1/4" BSPF inlet
- Hi-Lo pressure

UR25 Rotating Nozzle - 250 Bar

Part No.	Jet
25.1620.30	03
25.1620.35	035
25.1620.40	04
25.1620.45	045
25.1620.50	05

Part No.	Jet
25.1620.55	055
25.1620.60	06
25.1620.65	065
25.1620.70	07
25.1620.80	08

- 6 - 29 Lpm working flow
- 100°C rated temperature
- 1/4" BSPF inlet
- Fixed pressure
- 80 Bar min pressure

UR32 Rotating Nozzle - 350 Bar

Part No.	Jet
25.1690.30	03
25.1690.35	035
25.1690.40	04
25.1690.45	045
25.1690.50	05

Part No.	Jet
25.1690.55	055
25.1690.60	06
25.1690.65	065
25.1690.70	07
25.1690.80	08

- 9.1 - 34 Lpm working flow
- 100°C rated temperature
- 1/4" BSPF inlet
- Fixed pressure
- 180 Bar min pressure

UR35 Rotating Nozzle - 350 Bar

Part No.	Jet
25.1735.35	035
25.1735.45	045
25.1735.55	055
25.1735.65	065
25.1735.90	09
25.1735.10	10
25.1735.19	20

- Max temp 90°C
- 1/4" BSPF inlet
- Fixed pressure

Rotomax Rotating Nozzle - 400 Bar

Part No.	Max Lpm	Jet
ROTOMAX401	17.7	1.4
ROTOMAX403	25.1	1.6

- Max temp 80°C
- 1/4" BSPF inlet
- Hi-Lo pressure
- Fitted with M4 jet

Rotojet 500 Rotating Nozzle - 500 Bar

Part No.	Jet
0204006800	03
0204006805	035
0204006810	04
0204006815	045
0204006820	05
0204006825	055

- Max temp 90°C
- 1/4" BSPF inlet
- Fixed pressure

500 Bar

UR60 Rotating Nozzle - 600 Bar

Part Number	Jet
25.1460.20	02
25.1460.30	03
25.1460.35	035
25.1460.40	04
25.1460.50	05
25.1460.60	06
25.1460.65	065
25.1460.70	07
25.1460.80	08

- 6.2 - 44.6 Lpm working flow
- 90°C rated temperature
- 1/4" BSPF inlet
- Fixed pressure
- 180 Bar min pressure

600 Bar

High Pressure Inline Filter

Part No.	Inlet	Outlet
0211000650	QR Adaptor	1/4" BSPM

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 100°C
- 110 mesh filter screen
- Brass construction
- Compatible with BE Series couplings, see page 224

High Pressure Inline Filter

Part No.	Inlet	Outlet
0211000660	1/4" BSPF	1/4" BSP M

- Max press 310 Bar
- Max flow 30 Lpm
- Max temp 100°C
- 110 mesh filter screen
- Brass construction

Variable Nozzle Head - 200 Bar

Part No.	Jet
VARIOJET	N/A

- Max flow 21 Lpm
- Max temp 140°C
- 1/4" BSPF inlet
- Variable angle spray pattern
- Jet not supplied, see M4 jets page 176

Variable Nozzle Head - 207 Bar

Part No.	Jet
470214	N/A

- Max flow 21 Lpm
- Max temp 60°C
- 1/4" BSPF inlet
- Hi-Lo pressure, variable angle head
- Jet not supplied, see M4 jets page 176

Variable Nozzle Head - 250 Bar

Part No.	Jet
MULTIREG	N/A

- Max flow 21 Lpm
- Max temp 60°C
- 1/4" BSPF inlet
- Hi-Lo pressure, variable angle head
- Jet not supplied, see M4 jets page 176

Hi-Lo Pressure Head

Part No.
470110

- Max press 220 Bar
- Max flow 30 Lpm
- Max temp 150°C
- Twist from high-low pressure
- 1/4" BSPF in - 1/4" NPTF out

Hi-Lo Pressure Head

Part No.
22.0000.00

- 250 Bar rated pressure
- 30 Lpm max flow
- 160°C max temperature
- Twist from high-low pressure
- 1/4" BSPF inlet - 1/4" NPTF outlet

Hi-Lo Pressure Head

Part No.
0204009800

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 160°C
- Twist from high-low pressure
- 1/4" BSPF in - 1/4" NPTF out
- Non-scratch nozzle cover

Change-Over Head

Part No.
23.0015.00

- Max press 200 Bar
- Max flow 40 Lpm
- Max temp 90°C
- 1/4" BSPF inlet
- 2 x 1/4" NPTF outlets

Pivot Coupler



Part No.
85.300.172

- Max press 275 Bar
- 3 positon, 90° range
- Compatible with BE QR couplers & nozzles, see page 176 & 224

Sandblasting Heads

Sand Blasting Heads

TPS560 Sand Blast Head - 500 Bar

Part No.
470018

- Max press 500 Bar
- Max flow 80 Lpm
- Max temp 90°C
- 1/4" BSPF inlet
- 3/4" Ø hose tail

Requires a standard 1/4" x 15° flat MEG nozzle. Nozzle size should match flow and pressure of pressure washer being used. This head is not supplied with a sand probe.



Sand Probe for TPS560 Head

Part No.
460404

- S/Steel construction
- 3/4" Ø hose tail
- Adjustable sand flow

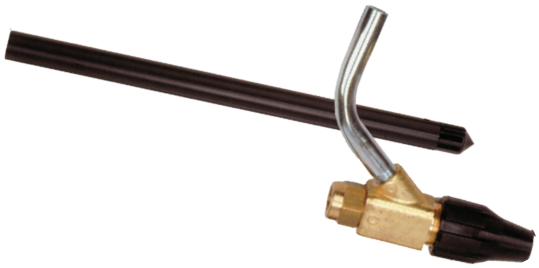

Sand Blast Heads - 200 Bar

Part No.	Nozzle No.
SANDBLAST TYPE 0	1.50
SANDBLAST TYPE 1	1.60
SANDBLAST TYPE 2	1.70
SANDBLAST TYPE 3	1.85
SANDBLAST TYPE 4	2.10
SANDBLAST TYPE 5	2.30

- Max press 200 Bar - flow 50 Lpm
- 1/4" BSPF inlet - 1/2" Ø hose tail
- Use dry - kiln dried sand
- Price includes sand poker

Sand Blast Kits

Part No.	Max Bar	Max Lpm	Description
SANDKIT1	100	30	Sand blast kit for Cleanmatic & Boxjet - hose length 3.5m
TXSANDKIT1	250	50	Sand blasting kit for TSX/TX - hose length 3.5m

Drain Cleaning Nozzles & Heads

Drainet Fixed Nozzle - 200 Bar

Part No.	Jet	Inlet
DRAINET	Adj	3/8" BSPM

- Max flow 60 Lpm
- 3 rear facing jets
- Adjustable jet size

PA Fixed Nozzles - 250 Bar

Part No.	Jet	Inlet	Front	Rear
25.1201.51	04	1/4" BSPM	1	3
25.1210.51	06	3/8" BSPM	1	8

- 90°C rated temperature
- Stainless steel

ST4 Fixed Nozzles - 350 Bar

- 90°C rated temperature
- AISI 303 stainless steel
- 1 forward & 3 rear facing jets

Part No.	Jet	Thread
25.1204.30	03	1/8" BSPF
25.1204.40	04	1/8" BSPF
25.1204.50	05	1/8" BSPF
25.1204.60	06	1/8" BSPF
25.1204.70	07	1/8" BSPF
25.1204.80	08	1/8" BSPF

Part No.	Jet	Thread
25.1214.30	03	1/4" BSPF
25.1214.40	04	1/4" BSPF
25.1214.50	05	1/4" BSPF
25.1214.60	06	1/4" BSPF
25.1214.70	07	1/4" BSPF
25.1214.80	08	1/4" BSPF

Part No.	Jet	Thread
25.1224.30	03	3/8" BSPF
25.1224.40	04	3/8" BSPF
25.1224.50	05	3/8" BSPF
25.1224.60	06	3/8" BSPF
25.1224.70	07	3/8" BSPF
25.1224.80	08	3/8" BSPF

STR Rotating Head - 250 Bar

- 90°C rated temperature
- AISI 303 stainless steel
- 3 rear facing rotating jets

Part No.	Jet	Thread
25.1285.30	03	1/8" BSPF
25.1285.40	04	1/8" BSPF
25.1285.50	05	1/8" BSPF
25.1285.60	06	1/8" BSPF
25.1285.70	07	1/8" BSPF
25.1285.80	08	1/8" BSPF

Part No.	Jet	Thread
25.1290.30	03	1/4" BSPF
25.1290.40	04	1/4" BSPF
25.1290.50	05	1/4" BSPF
25.1290.60	06	1/4" BSPF
25.1290.70	07	1/4" BSPF
25.1290.80	08	1/4" BSPF

Part No.	Jet	Thread
25.1295.60	06	3/8" BSPF
25.1295.70	07	3/8" BSPF
25.1295.80	08	3/8" BSPF
25.1295.90	09	3/8" BSPF
25.1295.10	10	3/8" BSPF
25.1295.11	11	3/8" BSPF

High Volume Fixed Heads - 300 Bar

Part No.	Size	Inlet	Max Ø	Length
25.1236.20*	20	1/2" BSPF	27.5mm	40mm
25.1237.30	30	3/4" BSPF	38mm	62mm
25.1237.40	40	3/4" BSPF	38mm	62mm
25.1237.60	60	3/4" BSPF	38mm	62mm
25.1239.50	50	1" BSPF	45mm	66mm
25.1239.60	60	1" BSPF	45mm	66mm
25.1239.80	80	1" BSPF	45mm	66mm

- Max temp 160°C
- Zinc plated hardened steel
- 6 rear facing & one front facing jets
- *5 rear facing jets
- Replaceable S/Steel jets

High Volume Rotary Heads - 300 Bar

Part No.	Size	Inlet	Max Ø	Length
25.1246.20	20	1/2" BSPF	35mm	78mm
25.1247.30	30	3/4" BSPF	49.5mm	100mm
25.1247.40	40	3/4" BSPF	49.5mm	100mm
25.1249.50	50	1" BSPF	49.5mm	100mm
25.1249.70	70	1" BSPF	49.5mm	100mm

- Max temp 160°C
- Hardened 420B S/Steel
- 6 rear facing jets for thrust
- 4 side jets for rotation & cleaning
- Anti-clockwise rotation
- Replaceable S/Steel jets

Interpump Drain Cleaning Kits

Part No.	Bar	Lpm	Temp	Fits
DRAINKIT	110	11	60°C	Cleanmatic, Boxjet & Quicky
TXDRAINKIT1	200	15	60°C	IP, TX & TSX

- 10 metre hose
- TXDRAINKIT1 - M22 M inlet
- DRAINKIT fitting Cleanmatic & Boxjet inlet

Nozzles

Spray & Wash Gun Nozzles - 275 Bar

- M15 x 1 male thread
- Compatible with high volume wash guns see page 179

Part No.	Nozzle Ø mm	Bar	15	25	35	40	45	50	60	80	100	120	150
ART811-1	1	Flow Rate Lpm	2.50	3.10	3.50	3.65	3.85	4.10	4.55	5.8	6.7	7.1	7.9
ART811-1.2	1.2		3.80	4.60	5.40	5.90	6.10	6.30	7.00	8.2	9.2	10.1	11.3
ART811-1.5	1.5		5.10	6.50	7.40	7.80	8.20	8.60	9.50	10.8	12.1	13.2	14.8
ART811-1.8	1.8		7.30	9.30	10.80	11.70	12.20	12.70	13.60	14.5	16.2	17.7	19.8
ART811-2	2		8.80	11.70	13.40	14.30	15.20	15.80	17.10	18.5	20.7	22.7	25.3
ART811-2.3	2.3		10.80	14.10	16.80	17.90	18.80	19.70	22.10	26.8	30	32.8	36.7
ART811-2.5	2.5		13.00	16.40	19.10	21.00	15.40	23.00	25.40				
ART811-3	3		18.40	24.10	28.20	30.10	31.50	33.00	36.30				
ART811-3.5	3.5		24.20	30.50	36.00	38.50	41.50	44.00	50.00				
ART811-4	4		30.2	39	46.1	49.3	52.3	55.2	60.4				
ART811-4.5	4.5		36.4	47	55.6	59.5	63.1	66.5	72.8				
ART811-5	5		41.8	54	64	68.3	72.5	76.4	83.7				
ART811-5.5	5.5		47.3	61	72.2	77.2	81.8	86.3	94.5				

M4 Nozzles - 400 Bar

STAINLESS STEEL

Part No.	Colour	Nozzle Ø mm	Size	Bar	40	50	60	70	80	90	100	110	120	130	140	150	160	175	200
180060	Brown	1.0	02	Flow Rate Lpm	-	-	-	3.8	4.1	4.4	4.6	4.8	5.0	5.2	5.4	5.6	5.8	6.1	6.5
98.6610.00	Beige	1.25	025		4.8	5.4	5.8	6.3	6.7	7.2	7.5	7.9	8.3	8.6	8.9	9.2	9.5	10.0	10.8
98.6615.00	Orange	1.30	03		5.2	5.8	6.3	6.8	7.3	7.8	8.2	8.6	9.0	9.3	9.7	10	10.3	10.8	11.6
98.6632.00	Dk Blue	1.35	035		5.6	6.3	6.8	7.3	7.9	8.4	8.8	9.3	9.6	10	10.4	10.8	11.1	11.7	12.5
98.6674.00	Red	1.40	04		6.2	6.6	7.4	8.0	8.3	9.0	9.6	10	10.2	10.7	11.3	11.6	11.8	12.5	13.2
98.6690.00	Yellow	1.45	045		6.6	7.0	7.7	8.3	8.8	9.4	10	10.4	10.9	11.5	11.7	12.1	12.5	13	13.8
98.6725.00	Lt Blue	1.50	05		7.0	8.0	8.4	9.4	10	10.5	11.3	11.7	12.1	12.8	13.1	13.5	14	14.6	15.4
98.6756.00	White	1.55	055		7.6	8.3	9.1	10	10.9	11.6	12.1	12.6	13.2	13.5	14.1	14.6	15.1	15.8	16.9
98.6780.00	Black	1.60	06		8.4	9.8	10.6	11.5	12.2	13	13.5	14.3	14.9	15.5	16.1	16.6	17.2	18	19.3
98.6820.00	Purple	1.65	063		8.9	10	11.1	11.8	12.8	13.3	14	14.7	15.4	16	16.6	17.2	17.7	18.5	19.8
98.6915.00	Brown	1.70	065		9.6	10.6	11.6	12.4	13.2	14	14.8	15.5	16.2	16.9	17.5	18.1	18.7	19.6	20.9
98.6935.00	Neutral	1.75	07		9.9	11.3	12	13	13.7	14.6	15.3	16.1	16.8	17.4	18.1	18.7	19.4	20.2	21.6
98.6963.00	Green	1.80	075		10.8	11.7	13	14	15	15.9	16.7	17.5	18.3	19	19.7	20.4	21.1	22.1	23.6

Quick Connect Nozzles - 275 Bar

Part No.	Size
85.201.020	020
85.201.025	025
85.201.030	030
85.201.035	035
85.201.040	040
85.201.045	045
85.201.050	050
85.201.055	055
85.201.060	060
85.201.065	065
85.201.070	070
85.201.075	075
85.201.080	080
85.201.085	085
85.201.090	090

Part No.	Size
85.216.020	020
85.216.025	025
85.216.030	030
85.216.035	035
85.216.040	040
85.216.045	045
85.216.050	050
85.216.055	055
85.216.060	060
85.216.065	065
85.216.070	070
85.216.075	075
85.216.080	080
85.216.085	085
85.216.090	090

Part No.	Size
85.226.020	020
85.226.025	025
85.226.030	030
85.226.035	035
85.226.040	040
85.226.045	045
85.226.050	050
85.226.055	055
85.226.060	060
85.226.065	065
85.226.070	070
85.226.075	075
85.226.080	080
85.226.085	085
85.226.090	090

Part No.	Size
85.241.020	020
85.241.025	025
85.241.030	030
85.241.035	035
85.241.040	040
85.241.045	045
85.241.050	050
85.241.055	055
85.241.060	060
85.241.065	065
85.241.070	070
85.241.075	075
85.241.080	080
85.241.085	085
85.241.090	090

Low Pressure Chemical Nozzle

Part No.	Description
85.266.400	Chemical nozzle

- Compatible with BE Series QR Couplings

QR Couplings

Page 224

1/8" Nozzles - 275 Bar

Part No.	Size
900020S	02
900025S	025
900030S	03
900035S	035
900040S	04
-	045
900050S	05
-	055
900060S	06
-	065
-	07

Part No.	Size
915020S	02
915025S	025
915030S	03
915035S	035
915040S	04
915045S	045
91505S	05
915055S	055
91506S	06
-	065
91507S	07

Part No.	Size
925020S	02
925025S	025
925030S	03
925035S	035
925040S	04
-	045
925050S	05
-	055
-	06
-	065
-	07

Part No.	Size
940020S	02
940025S	025
940030S	03
940035S	035
940040S	04
-	045
940050S	05
-	055
-	06
-	065
-	07

Nozzle Charts



Page 338-341

1/4" Nozzles - 275 Bar

Part No.	Size
N0002SS	02
-	025
N0003SS	03
N00035SS	035
N0004SS	04
N00045SS	045
N0005SS	05
N00055SS	055
N0006SS	06
N00065SS	065
N0007SS	07
-	075
N0008SS	08
N0009SS	09
N0010SS	10
-	12
N00125SS	12.5
-	13
N0015SS	15
N0018SS	18
N0020SS	20
N0025SS	25
N0030SS	30
-	35
N0050SS	50

Part No.	Size
N1502SS	02
-	025
N1503SS	03
N15035SS	035
N1504SS	04
N15045SS	045
N1505SS	05
N15055SS	055
N1506SS	06
N15065SS	065
N1507SS	07
-	075
N1508SS	08
N1509SS	09
N1510SS	10
N1512SS	12
-	12.5
-	13
N1515SS	15
N1518SS	18
-	20
-	25
-	30
-	35
N1550SS	50

Part No.	Size
N2502SS	02
N25025SS	025
N2503SS	03
N25035SS	035
N2504SS	04
N25045SS	045
N2505SS	05
N25055SS	055
N2506SS	06
N25065SS	065
N2507SS	07
N25075SS	075
N2508SS	08
N2509SS	09
N2510SS	10
-	12
N25125SS	12.5
N2513SS	13
N2515SS	15
-	18
N2520SS	20
-	25
-	30
-	35
-	50

Part No.	Size
N4002SS	02
-	025
N4003SS	03
N40035SS	035
N4004SS	04
N40045SS	045
N4005SS	05
N40055SS	055
N4006SS	06
N40065SS	065
N4007SS	07
-	075
N4008SS	08
N4009SS	09
	10
N4012SS	12
N40125SS	12.5
-	13
N4015SS	15
-	18
-	20
N4025SS	25
-	30
N4035SS	35
N4050SS	50

Part No.	Size
N6502SS	02
-	025
N6503SS	03
-	035
-	04
-	045
-	05
-	055
-	06
-	065
-	07
-	075
N6508SS	08
-	09
-	10
-	12
-	12.5
-	13
-	15
-	18
-	20
-	25
-	30
-	35
-	50

1/4" Nozzles - 500 Bar

Part No.	Size
0124006110	025
0124006210	030
0124006310	035
0124006410	040
0124006510	045
0124006610	050
0124006710	055

- Stainless steel body
- Ceramic nozzle tip

1/4" Low Pressure Nozzle - Brass

Part No.	Nozzle Angle	Size
N4040B	40°	40
N6540B	65°	40

- Brass construction

Foam Heads & Injectors

Foam Heads & Injectors

Foam head & injector must be used together

Foam Head & Injector

Part No.	Item	Lpm	Nozzle
25.1851.68	Head	25	1.8mm
21.0600.12	Injec	11-15	1.2mm

- Max press 200 Bar
- Max temp 60°C
- 1/4" F in - foam head
- 3/8" M in x 3/8" M out - injector
- 1/4" chemical inlet barb

Foam Injection Head

Part No.	Lpm	Nozzle
25.1800.65	25	1.5mm

- Max press 200 Bar
- 1/4" F inlet
- Max temp 60°C
- 1/4" chemical barb

Foam Injection Head with Bottle

Part No.	Bottle	Inlet	Nozzle
25.1840.71	1 litre	1/4" F	2.1mm
25.1842.65	2 litre	1/4" F	1.5mm
25.1868.15	2 litre	3/8" M	1.5mm

- Max press 200 Bar
- Flow rate 25 Lpm
- Max temp 60°C
- Proportional adjustment

Foam Injection Head with Bottle

Part No.	Nozzle
FOAMER1	1.40 Red
FOAMER2	1.60 Black
FOAMER3	1.70 Brown

- Max press 200 Bar
- Max temp 60°C
- 0.5 litre bottle - 1/4" F inlet
- Variable angle spray pattern

LS3-1 Foam Injection Head with Tank

Part No.
25.1526.12

- 160 Bar rated pressure
- 60°C rated temperature
- 1.25mm nozzle
- 1 Litre chemical tank
- Vertical fan spray
- Brass & s/steel injector body
- 1/4" BSPF inlet

LS1 Low Pressure Foamer

Part No.
15.0100.01

- 3-6 Bar working pressure
- 50°C max temperature
- 1 Litre chemical bottle
- 1/2" BSPM inlet

Foam Generators

Part No.	Lpm	Bar	Nozzle
29.060	13	250	1.5mm
21.0800.25	40	120	2.5mm

- 1/4" F in x 1/4" M tapered out
- Max temp 90°C
- For use with car wash brush

Foam Head with Extension Lance

Part No.	Description
TXFOAMKIT1	M22 M coupling - 50 CL bottle

- Max press 250 Bar
- Max flow 17 Lpm
- Max temp 60°C

Foam Injection Kit

Kit is supplied with range of nozzle sizes from 1.4 - 1.7

Part No.
DFK001

- Max press 200 Bar
- Max flow 15 Lpm
- Max temp 60°C
- 0.5 litre tank
- Variable angle spray pattern

ARS Quick Release Lance System

Part No.	Length
40.2290.23	900mm

- S/Steel lance with protector
- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C

STAINLESS STEEL

Foamer head & injector must be used together

Part No.
30.4140.23

- Gun with 3/8" F inlet
- Max press 250 Bar
- Max flow 40 Lpm
- Max temp 160°C

Part No.
25.1823.21

- Foamer head - 2.1mm nozzle
- Max press 200 Bar
- Max flow 25 Lpm
- Max temp 60°C

Part No.
21.0600.12

- Adj. injector - 1.2mm nozzle
- Max press 220 Bar
- Max flow 30 Lpm
- Max temp 90°C

High Volume Spray & Wash Gun & Lance

Adjustable spray pattern from straight to cone by operating the central regulator handle.

SLAM907 Gun with Adjustable Spray Pattern

Part No.	Max Press	Inlet	Nozzle
8284011	50 Bar	1/2" M Swivel	1.5mm

- Brass & S/Steel internals
- Reinforced nylon handle
- For M15x1 nozzles

Spray & Wash Gun Nozzles P176

Turbo Gun with Swivel

Part No.	Max Press	Max Flow	Inlet	Nozzle
26.901.162	50 Bar	70 Lpm	1/2" M Thread	1.5mm
26.901.165	50 Bar	70 Lpm	1/2" M Swivel	1.5mm

- Brass & S/Steel internals
- Viton seals
- Max temp 60°C
- Max nozzle size 2.3mm

Spray & Wash Gun Nozzles P176

LXC2002 High Volume Wash Lance with Adjustable Spray Pattern

Part No.	Max Press	Inlet	Nozzle
8282012	50 Bar	1/2" M Thread	2.3mm

- Brass & S/Steel internals
- Thermoplastic rubber protectors
- 600mm long
- For M15x1 nozzles

Spray & Wash Gun Nozzles P176

High Volume Wash Lance with Adjustable Spray Pattern

Part No.	Max Press	Max Flow	Inlet	Nozzle
13.901.151	60 Bar	110 Lpm	1/2" M Thread	4.5mm

- S/Steel tube & trigger
- Brass internals
- Thermoplastic rubber protectors
- 700mm long
- Max temp 60°C
- Max nozzle size 5.5mm

Spray & Wash Gun Nozzles P176

High Volume Wash Guns

AKBO Wash Guns & Accessories

- Durable EPDM rubber casing
- Stainless steel & EPDM internal parts
- Adjustable water volume
- Adjustable spray pattern (except foam gun)

Compact Wash Gun - 50°C

Part No.	Bar	Lpm	Inlet	Outlet	Material
406-1020	12	25	1/2" F	Variable Jet	Aluminium

- Housing in aluminium
- Stainless Steel handle
- EPDM Cover and seals
- Weighs only 370 grams

Spray pattern dependent on trigger position

Swivel for Compact Wash Gun

Part No.
SWIFM112

- Brass construction
- Max press 12 Bar
- Max temp 90°C
- 1/2" BSPM x 1/2" Ø Barb

Water Gun - 95°C

Part No.	Bar	Lpm	Inlet	Outlet	Material
AKBO001	24	65	1/2" F	Variable Jet	Brass
AKRVS01	24	65	1/2" F	Variable Jet	S/Steel

- Adjustable spray pattern from solid jet to fine spray by on/off trigger
- Adjustable water volume by turning finger screw on rear of gun
- AKRVS01 has insulated trigger

Hot Water Gun - 95°C

Part No.	Bar	Lpm	Inlet	Outlet	Material
AKRHP01-R	24	65	1/2" F	Variable Jet	S/Steel

- Adjustable spray pattern from solid jet to fine spray by on/off trigger
- Adjustable water volume by turning finger screw on rear of gun

Foam Gun - 95°C

Part No.	Bar	Lpm	Inlet	Outlet	Material
AKRVL01	24	65	1/2" F	1/2" M	S/Steel
To generate foam use lance assembly **LANCEM03** + coupling **COUPL01-F**					

- 1/2" male threaded outlet for mounting foam lance p/n LANCEM03
- Adjustable water volume by turning finger screw on rear of gun

Foam Lance with QR Adaptor

Part No.	Length
LANCEM03	260mm
LANCM50-NA-NW	540mm

- Max press 20 Bar
- Stainless steel
- Max temp 90°C
- For use with gun AKRVL01

QRC for Foam Lance

Part No.
COUPL01-F

- For connecting LANCEM03 to gun
- Max press 200 Bar
- 1/2" F thread
- Max temp 100°C

Reducing Socket - Brass

Part No.
NIP5025

- Connects 1/4" M lance to AKRVL01
- Max press 40 Bar
- 1/2" F x 1/4" F threads
- Max temp 90°C

NITO QR Adaptors x Male Thread

Part No.	Compatible with	Thread
A221-6L	AKBO131	1/2" M
AKB2221	AKB2133	1/2" M

- Max press 10 Bar
- Chrome plated brass
- Max temp 100°C
- See page 223 for full NITO range

NITO QR Couplers x Hose Barb

Part No.	Fits	Barb
AKBO131	AKBO221	1/2"
AKB2133	AKB2221	3/4"

- Max press 10 Bar
- Chrome plated brass
- Max temp 100°C
- See page 223 for full NITO range

Fixed Hose Tails

Part No.	Thread	Barb
RVST013	1/2" M	13mm
RVST016	1/2" M	16mm
RVST019	1/2" M	19mm
RVST025	1/2" M	25mm

- Max press 40 Bar
- 316 Stainless steel
- Max temp 100°C

Swivel Hose Tail

Part No.	Thread	Barb
SWIFB13	1/2"	13mm
SWIFB16	1/2"	16mm
SWIFB19	1/2"	19mm

- Max press 40 Bar
- 316 Stainless steel
- Max temp 100°C
- EPDM Seals

PA Wash Guns

- Shock proof thermoplastic casing
- Stainless steel & brass internal parts
- 3 rubber protection rings
- Adjustable spray pattern & water volume

RB35 Plastic - Swivel - 50 Lpm

Part No.	Bar	Lpm	Inlet	Max Temp	Material
30.6200.00	12	50	1/2" F Swivel	50°C	Brass
30.6250.00	12	50	1/2" F Swivel	80°C	S/Steel

- Blue shockproof polypropylene casing
- Weighs only 440 grams

RB65 Brass - Swivel - 60 to 100 Lpm

Part No.	Bar	Lpm	Inlet
30.6425.00	24	60	1/2" F Swivel
30.6445.00	24	100	1/2" F Swivel

- Max temp 90°C

RB65 Brass - Swivel - 60 Lpm

Part No.	Bar	Lpm	Inlet
30.6438.30	24	60	1/2" F Swivel

- Max temp 90°C

RB65 S/Steel - Swivel - 60 Lpm

Part No.	Bar	Lpm	Inlet
30.6300.00	24	60	1/2" F
30.6310.00	24	60	1/2" F Swivel

- Max temp 90°C

Unloader Valves

Trapped Pressure Unloader Valves

- Trapped pressure: in bypass mode this type of valve maintains a constant line pressure with zero pump pressure

HX - 130 Bar - 15 Lpm

Part No.	Bar	Lpm
HX	130	5-15

- Max temp 60°C
- 3/8" M inlet - 3/8" M outlet
- 3/8" M bypass

VB130 - 160 Bar - 25 Lpm

Part No.	Bar	Lpm
60.0300.00	160	25

- Max temp 90°C
- 3/8" M inlet - 3/8" M outlet
- 3/8" F bypass

VR54 - 180 Bar - 30 Lpm

Part No.	Bar	Lpm
4072000043	180	30

- Max temp 90°C
- 3/8" M inlet - 3/8" M outlet
- 3/8" F bypass

HM1 - 200 Bar - 41 Lpm

Part No.	Bar	Lpm
HM1	200	5 - 41

- Max temp 85°C
- 3/8" F inlet - 3/8" M outlet
- 3/8" F bypass
- 1/4" F gauge port

VB9 - 220 Bar - 30 Lpm

Part No.	Bar	Lpm
60.2250.00	22 - 220	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- 1/4" F gauge port
- Panel mount option

VRC3 - 220 Bar - 30 Lpm

Part No.	Bar	Lpm
0215010470	220	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- Panel mount option

Soft Start

VRS3 - 220 Bar - 30 Lpm

Part No.	Bar	Lpm
4072000022	220	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass

VRT3 - 140 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
0215010240	140	30
0215010250	220	30
0215010260	280	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass

VRT3 - 140 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
0215010360	140	30
0215010370	220	30
0215010380	280	30
4072000063*	280	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- 1/4" F gauge port
- *Panel mount option

VX3 - 140 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
4072200000	140	30
4072200001	220	30
4072200002	280	30

STAINLESS STEEL

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- AISI 303 stainless steel

Incorrect installation or valve selection can result in valve or pump failure, if unsure call for technical assistance

VRT3 - 280 Bar - 30 Lpm

Part No.	Bar	Lpm
4072000000	280	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- Valve must be mounted vertically

VB85 - 160 to 280 Bar - 80 Lpm

Part No.	Bar	Lpm
60.0490.00	160	80
60.0490.60	280	80

- Max temp 90°C
- 1/2" F inlet - 1/2" F outlet
- 1/2" F bypass

VB350 - 350 Bar - 40 Lpm

Part No.	Bar	Lpm
60.1700.00	350	40
60.1800.00*	350	40

- Max temp 90°C
- 3/8" M inlet - 3/8" F outlet
- 1/2" F bypass
- 1/4" F gauge port

*No adjustment knob cover

BH210 - 210 Bar - 100 Lpm

Part No.	Bar	Lpm
BH210	210	10-100

- Max temp 85°C
- 1/2" F inlet - 1/2" F outlet
- 3/4" F bypass

RA2 - 210 Bar - 230 Lpm

Part No.	Bar	Lpm
RA2	210	20 - 230

- Max temp 85°C
- 1" F inlet - 3/4" F outlet
- 1 1/4" F bypass

RA2L - 210 Bar - 230 Lpm

Part No.	Bar	Lpm
RA2L	210	20 - 230

- Max temp 85°C
- 1" F inlet - 3/4" F outlet
- 1 1/4" F bypass
- Manual bypass handle

H253 - 250 Bar - 30 Lpm

Part No.	Bar	Lpm
H253SS	250	8 - 30

- Max temp 60°C
- 3/8" F inlet - 3/8" M outlet
- 3/8" F bypass
- AISI 316 stainless steel

H450 - 400 Bar - 50 Lpm

Part No.	Bar	Lpm
H450	400	8 - 50

- Max temp 85°C
- 1/2" F inlet - 1/2" M outlet
- 1/2" F bypass

H560 - 500 Bar - 60 Lpm

Part No.	Bar	Lpm
H560	500	10 - 60

- Max temp 60°C
- 1/2" F inlet - 1/2" F outlet
- 1/2" F bypass
- 1/4" F gauge port
- AISI 420 stainless steel

VHP70 - 620 Bar - 80 Lpm

Part No.	Bar	Lpm
4072201000	620	80

- Max temp 90°C
- 1/2" F inlet - 1/2" F outlet
- 1/2" F bypass
- 1/4" F gauge port
- AISI 303 stainless steel

Incorrect installation or valve selection can result in valve or pump failure, if unsure call for technical assistance

Unloader Valves & Controlsets

VRT3 - 250 Bar

Part No.	Bar	Lpm	Injector Jet
ART612	250	10-16	2.1
ART613	250	14-21	2.3

- Max temp 90°C
- 3/8" F inlet - 3/8" M outlet
- 3/8" F bypass
- 1/4" F gauge port

with Injector

VRT3 - 280 Bar

Part No.	Bar	Lpm	Injector Jet
ART614	220	10-15	2.1
4072000117	220	14-21	2.3
4072000118	280	14-21	2.3

- Max temp 90°C
- 3/8" F inlet - M22 M outlet
- 3/8" F bypass

with Injector

VRT3-P - 140 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
0215010550	140	30
0215010560	220	30
4072000007	280	30

with Switch

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- Switching press 45 Bar
- Max current 16 Amps

VRT3-P - 140 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
0215010590	140	30
0215010600	220	30
4072000039	280	30

with Switch

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- 1/4" F gauge port
- Switching press 45 Bar
- Max current 16 Amps

VB9 - 220 Bar - 30 Lpm

Part No.	Bar	Lpm
60.2350.00	22 - 220	30

with Switch

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- 1/4" F gauge port
- Switching press 30 Bar
- Max current 6 Amps

Controlsets

Controlsets: are trapped pressure valves with internal bypass & integral low pressure chemical injection system

KR Series Controlsets

- Fit direct to Interpump manifolds

Part No.	Bar	Lpm	Compatible with Interpump Series
KR1	70	8	51
KR2	70	11	51
KR90	90	8	51
KR100	120	11	51

- Max temp 60°C
- M22 M inlet - M22 M outlet
- Adjustable chemical injection
- Pressure gauge

W1 Series Controlsets

- Fit direct to Interpump manifolds

Part No.	Bar	Lpm	Compatible with Interpump Series
W1.0	110	8-11	51
W1.1	110	12-15	51
W1.0L	110	8-11	44-49-50-60
W1.1L	110	12-15	44-49-50-60

- Max temp 75°C
- M22 M inlet - M22 M outlet
- Adjustable chemical injection

Incorrect installation or valve selection can result in valve or pump failure, if unsure call for technical assistance

W2 Series Controlsets

- Fit direct to Interpump manifolds

Part No.	Bar	Lpm	Compatible with Interpump Series
W2.1	200	11-15	44-49-50-60
W2.2	200	16-21	44-49-50-60

- Max temp 60°C
- M22 M inlet - M22 M outlet
- Adjustable chemical injection

W3 Series Controlsets

- Fit direct to Interpump manifolds

Part No.	Bar	Lpm	Compatible with Interpump Series
W3.0	275	7-10	44-47-49-50 52-60-63 58 - 59
W3.1	275	11-15	
W3.1-M22*	275	11-15	
W3.2	275	16-21	

*M22 M outlet

- Max temp 60°C
- 1/2" F inlet - 3/8" M outlet
- Adjustable chemical injection

VRF2 Controlset Valve

Part No.	Bar	Lpm	Colour
4072401001	220	30	Red
4072401000	280	30	Blue

- Max temp 90°C
- 3/8" F outlet
- **NOT SUPPLIED WITH VALVE LOWERS SEE TABLE BELOW**

VRF2 Controlset Valve & Chemical Injector

Part No.	Bar	Lpm
4072601020	220	30

- Max temp 90°C
- M22 M outlet
- Adjustable chemical injection
- 2.1mm injector nozzle
- **NOT SUPPLIED WITH VALVE LOWERS SEE TABLE BELOW**

VRF2 Controlset Lower & Banjo Bolt Kit

Part No.	Pump Series Compatibility	Inlet	Outlet	Type
4073900000	Interpump 44-47-50-60-63 Speck NP16 - Udor - Comet RW	1/2"	3/8"	38
4073900003	Interpump 58-59	1/2"	3/8"	38
0215200502	Interpump 94 Comet LW-ZW	1/2"	3/8"	19
4073900001	Leuco SST Udor	3/8"	3/8"	38
4073900002	A&R XM-XT-XR-HPE-RK - Comet FW Bertolini TW-TML-TWE-VML-KWE Hypro HY1805C-HY1827C	1/2"	3/8"	24

VB75 Series Controlset

- Fit direct to pump manifolds

Part No.	Bar	Lpm	Compatible with Interpump Series
60.0930.00	22-220	30	44-47-49-50 52-60-63

- Max temp 90°C
- 1/2" F inlet - 3/8" F outlet
- 3/8" & 1/2" banjo bolts

Incorrect installation or valve selection can result in valve or pump failure, if unsure call for technical assistance

Flow Sensitive Unloader Valves

Flow Sensitive Unloader Valves

- Flow sensitive: in bypass mode this valve reduces the discharge line & pump pressure to zero

K3 - 100 Bar - 8 to 21 Lpm

Part No.	Bar	Lpm
K3.0	100	8-11
K3.1	100	11-16
K3.2	100	16-21

- Max temp 60°C
- 3/8" F inlet - 1/2" M outlet
- 1/2" F & 3/4" M bypass
- 1/4" F gauge ports

K5 - 200 Bar - 11 to 41 Lpm

Part No.	Bar	Lpm
K5.1	200	11-16
K5.2	200	16-25
K5.3	200	25-41

- Max temp 60°C
- 3/8" F inlet - 1/2" M outlet
- 1/2" F & 3/4" M bypass
- 1/4" F gauge ports

K1 - 250 Bar - 41 Lpm

Part No.	Bar	Lpm
K1	250	9-41

- Max temp 60°C
- 3/8" F inlet - 1/2" M outlet
- 1/2" M bypass
- 1/4" F gauge ports

K7 - 200 Bar - 8 to 41 Lpm

Part No.	Bar	Lpm
K7.0	200	8-11
K7.1	200	11-16
K7.2	200	16-25
K7.3	200	25-41

- Max temp 60°C
- 3/8" F inlet - 3/8" M outlet
- 3/8" F bypass
- 1/4" F gauge port

K9 - 400 Bar - 50 Lpm

Part No.	Bar	Lpm
K9	400	15-50

- Max temp 60°C
- 1/2" F inlet - 1/2" M outlet
- 1/2" F bypass port

VB16 - 500 Bar - 80 Lpm

Part No.	Bar	Lpm
60.8000.00	100-500	80

- Max temp 90°C
- 1/2" F inlet - 1/2" F outlet
- 1/2" F bypass port
- 1/4" F gauge ports

BKX - 600 Bar - 60 Lpm

Part No.	Bar	Lpm
BKX600	600	15-60

- Max temp 60°C
- 1/2" F inlet - 1/2" F outlet
- 3/4" F bypass port

Incorrect installation or valve selection can result in valve or pump failure, if unsure call for technical assistance

Pressure Regulating Valves

- Pressure regulating valves are used to regulate pressure & protect the system when the discharge is closed
- Multiple outlets: in applications where more than one outlet is required a constant system pressure is maintained
- System working pressure: is maintained regardless of what percentage of fluid is bypassed

4 to 10 Bar

Part No.	Bar	Inlet	Outlet
8384043	4	3/4" M	1/2" M
8384044	10	3/4" M	1/2" M
8384045	4	3/4" M	3/4" M
8384046	10	3/4" M	3/4" M

- Mount off line on a tee
- Max temp 60°C
- 1/4" F gauge port
- Polypropylene body - Viton seals

3300 - 10.3 to 17.2 Bar

Part No.	Bar
3300-0015	10.3
3300-0016	17.2

- Mount off-line on a tee
- Max temp 60°C
- 3/4" NPTM inlet
- 3/4" NPTF bypass
- Nylon body & valve seat

3316 - 13.8 Bar

Part No.	Bar
3316-0002	13.8

- Mount off-line on a tee
- Max temp 80°C
- 1 1/4" M inlet
- 1 1/4" F bypass
- Cast Iron body & S/Steel valve cone

3300 - 13.8 to 27.6 Bar

Part No.	Bar	Inlet	Bypass
3300-0002	13.8	1/2" M	1/2" F
3300-0001	27.6	3/4" M	3/4" F

- Mount off-line on a tee
- Max temp 80°C
- Bronze body & S/Steel valve ball

G2 - 20 Bar - 400 Lpm

Part No.	Bar	Lpm
401-1015	20	400

- Mount in-line
- 1 1/2" M & 2" M ports
- 1 1/2" M bypass
- Fibreglass reinforced nylon
- Buna seals

G6 - 15 Bar - 600 Lpm

Part No.	Bar	Lpm
401-1020	15	600

- Mount in-line
- 2" M ports
- 2" M bypass
- Fibreglass reinforced nylon
- Buna seals

555 - 35 to 140 Bar - 35 Lpm

Part No.	Bar	Lpm
ART555-35	35	35
ART555-70	70	35
ART555-140	140	35

- Mount off-line on a tee
- Max temp 80°C
- 3/8" NPTF inlet
- 3/8" NPTF bypass

556 - 35 to 140 Bar - 25 Lpm

Part No.	Bar	Lpm
ART556-35	35	25
ART556-70	70	25
ART556-140	140	25

- Mount in-line
- Max temp 80°C
- 3/8" NPTF inlet - 3/8" NPTF outlet
- 3/8" NPTF bypass

HXM - 130 Bar - 15 Lpm

Part No.	Bar	Lpm
HXM	130	15

Misting Application

- Max temp 60°C
- 3/8" M inlet - 3/8" M outlet
- 3/8" M bypass
- Misting specific regulating valve

SVL - 150 to 280 Bar - 25 Lpm

Part No.	Bar	Lpm
4072000099	25-150	25
0215010230	25-280	25

- Mount off-line on a tee
- Max temp 90°C
- 3/8" F inlet
- 3/8" F bypass

Pressure Regulating Valves

SVT - 150 to 250 Bar - 25 Lpm

Part No.	Bar	Lpm
4072000100	25-150	25
0215010200	25-250	25

- Mount in-line
- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass

VS220 - 220 Bar - 24 Lpm

Part No.	Bar	Lpm
60.0525.00	22-220	24

- Mount in-line
- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass

SX1 - 250 Bar - 60 Lpm

Part No.	Bar	Lpm
SX1	250	60

- Mount off-line on a tee
- Max temp 85°C
- 1/2" F inlet
- 1/2" F bypass
- AISI 316L stainless steel

SVT40 - 360 Bar - 25 Lpm

Part No.	Bar	Lpm
0215010420	36-360	25

- Mount in-line
- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass

VS80 - 150 to 400 Bar - 80 Lpm

Part No.	Bar	Lpm
60.0590.00†	15-150	80
60.0590.60†	28-280	80
60.0550.00*	40-400	80

- Max temp 90°C
- 1/2" F inlet - 1/2" F outlet
- 1/2" F bypass
- AISI 316 (*303) S/Steel
- †ATEX certified

VXR3 - 160 to 280 Bar - 30 Lpm

Part No.	Bar	Lpm
4072300000	160	30
4072300001	280	30

- Max temp 90°C
- 3/8" F inlet - 3/8" F outlet
- Aisi 303 S/Steel
- Can also be used as safety valve

TIMAX - 60 Bar - 200 Lpm

Part No.	Bar	Lpm
TIMAX	60	200

- Max temp 60°C
- 3/4" F inlet - 3 x 1/2" F outlet
- 1" F bypass
- Manual bypass handle

TIMAX100 - 100 Bar - 200 Lpm

Part No.	Bar	Lpm
TIMAX100	100	200

- Max temp 60°C
- 3/4" F inlet - 3 x 1/2" F outlet
- 1" F bypass port
- Manual bypass lever

VS200 - 180 Bar - 200 Lpm

Part No.	Bar	Lpm
60.5100.15	18-180	200

- Mount off-line on a tee
- Max temp 90°C
- 3/4" F inlet
- 1/2" F bypass

R2 - 210 Bar - 230 Lpm

Part No.	Bar	Lpm
R2	210	230

- Max temp 85°C
- 1" F inlet - 3/4" F outlet
- 1 1/4" F bypass

R2L - 210 Bar - 230 Lpm

Part No.	Bar	Lpm
R2L	210	230

- Max temp 85°C
- 1" F inlet - 3/4" F out
- 1 1/4" F bypass
- Manual bypass handle

R3 - 230 to 450 Bar - 341 to 500 Lpm

Part No.	Bar	Lpm	Inlet	Bypass
R3-LP	230	500	1 1/4" F	1 1/4" F
R3-HP	450	341	1" F	1" F

- Max temp 85°C
- Stainless steel valve & seat (LP)
- Brass body - S/Steel internals (HP)

R3X - 230 to 450 Bar - 340 to 500 Lpm

Part No.	Bar	Lpm	Inlet	Bypass
R3X-LP	230	500	1 1/4" F	1 1/4" F
R3X-HP	450	340	1" F	1" F

- Max temp 85°C
- AISI 316 stainless steel

R1 - 200 to 600 Bar - 70 to 110 Lpm

Part No.	Bar	Lpm
R1/200	200	110
R1/400	400	110
R1/600	600	70

- Max temp 85°C
- 3/4" F inlet
- 3/4" F bypass

R1X - 200 to 600 Bar - 70 to 110 Lpm

Part No.	Bar	Lpm
R1X/200	200	110
R1X/400	400	110
R1X/600	600	70

- Max temp 85°C
- 3/4" F inlet
- 3/4" F bypass
- AISI 316 stainless steel

R1503 - 1500 Bar - 30 Lpm

Part No.	Bar	Lpm
R1503	1500	30

- Max temp 30°C
- 6mm inlet - 1/2" F outlet
- 1/2" F bypass
- S/Steel construction

R1510 - 1500 Bar - 100 Lpm

Part No.	Bar	Lpm
R1510	1500	100

- Max temp 30°C
- 14mm inlet - 1/2" F outlet
- 3/4" F bypass
- S/Steel construction

R1520 - 1500 Bar - 240 Lpm

Part No.	Bar	Lpm
R1520	1500	240

- Max temp 30°C
- 19mm inlet - 1" F outlet
- 1 1/4" F bypass
- S/Steel construction

R4090 - 220 to 400 Bar - 833 to 965 Lpm

Part No.	Bar	Lpm
R4090-LP	220	965
R4090-HP	400	833

- Max temp 40°C
- 63mm inlet - 2 1/2" F outlet
- 2 1/2" F bypass
- S/Steel construction

Safety Relief Valves

- Safety relief valves are designed to protect a pump or system when its maximum pressure has been exceeded
- **Important:** safety relief valves must never be used in place of pressure regulator or unloader valves
- **Important:** safety valves should be set at 20% above system working pressure

VS - 30 to 140 Bar - 14 Lpm

Part No.	Bar	Lpm
60.0560.30	5-30	14
60.0560.00	14-140	14

- Max temp 90°C
- 1/4" M inlet
- 1/8" F & 13mm barb outlet
- Not preset

VS28 - 165 to 220 Bar - 8 to 16 Lpm

Part No.	Bar	Lpm
60.0555.15	165	8-12
60.0555.16	165	12-16
60.0555.22	220	12-16

- Max temp 108°C
- 1/4" M inlet
- 16mm hose barb outlet
- Not preset

SR - 200 Bar - 41 Lpm

Part No.	Bar	Lpm
SR	30-200	6-41

- Max temp 60°C
- 3/8" M inlet - 1/4" F outlet
- Not preset

S284 - 280 Bar - 41 Lpm

Part No.	Bar	Lpm
S284	50-280	7-41

- Max temp 85°C
- 3/8" M inlet
- 10mm hose barb outlet
- Not preset

S455 - 150 to 450 Bar - 500 Lpm

Part No.	Bar	Lpm
S455/150	60-150	80-500
S455/170	60-170	80-500
S455/200	60-200	80-500
S455/300	60-300	80-500
S455/400	60-400	80-500
S455/450	60-450	80-500

- 85°C max water temperature
- 3/4" M inlet
- 36mm hose barb bypass
- Factory set & sealed

SX2/SX3 - 100 to 600 Bar - 190 to 500 Lpm

Part No.	Bar	Lpm	Inlet
SX2/100	60-100	15-190	1/2" M
SX2/130	60-130	15-190	1/2" M
SX2/150	60-150	15-190	1/2" M
SX2/180	60-180	15-190	1/2" M
SX2/200	60-200	15-190	1/2" M
SX2/400	60-400	15-190	1/2" M
SX2/500	60-500	15-190	1/2" M
SX2/600	60-600	15-190	1/2" M
SX3/130	60-130	80-500	3/4" M
SX3/300	60-300	80-500	3/4" M

- Max temp 60°C
- Factory set & sealed

S3 - 700 Bar - 100 Lpm

Part No.	Bar	Lpm
S3	60-700	10-100

- Max temp 60°C
- 1/2" M inlet
- Not preset

S723 - 100 to 600 Bar - 230 Lpm

Part No.	Bar	Lpm
S723/100	60-100	15-230
S723/130	60-130	15-230
S723/136	60-136	15-230
S723/150	60-150	15-230
S723/200	60-200	15-230
S723/250	60-250	15-230
S723/280	60-280	15-230
S723/300	60-300	15-230
S723/350	60-350	15-230
S723/400	60-400	15-230
S723/500	60-500	15-230
S723/600	60-600	15-230

- Max temp 60°C
- 1/2" M inlet
- 30.4mm hose barb bypass
- Factory set & sealed

Factory preset valves are set at 20% above max working pressure.
Example: 200 bar valve releases at 240 bar.

S1503 - 1800 Bar - 30 Lpm

Part No.	Bar	Lpm
S1503	700-1800	10-30

- Max temp 30°C
- 1/2" M inlet
- 14mm hose barb outlet
- Factory set & sealed to order

S1510 - 1800 Bar - 100 Lpm

Part No.	Bar	Lpm
S1510	480-1800	20-100

- Max temp 30°C
- 1/2" M inlet
- 25mm hose barb outlet
- Factory set & sealed to order

S1520 - 1500 Bar - 240 Lpm

Part No.	Bar	Lpm
S1520	1500	240

- Max temp 30°C
- 1" M inlet
- S/Steel construction
- Factory set & sealed to order

S4090 - 400 Bar - 900 Lpm

Part No.	Bar	Lpm
S4090	0-400	900

- Max temp 85°C
- 1 1/2" M inlet
- S/Steel construction
- Factory set & sealed to order

Factory preset valves are set at 20% above max working pressure.
Example: 200 bar valve releases at 240 bar.

Pneumatic Valves

Pneumatic Unloader & Distributor Valves

PNRA2 - 210 Bar

Part No.	Bar	Lpm	Air Press
PNRA2	210	20-230	8 Bar

- Max temp 85°C
- 1" F inlet - 3/4" F outlet
- 1 1/4" F bypass
- 1/4" F air ports

PN2 - 140 to 500 Bar

Part No.	Bar	Lpm	Air Press
PN2/140	140	230	7 Bar
PN2/250	250	230	6.3 Bar
PN2/500	500	230	7.5 Bar

- Max temp 60°C
- 1" F inlet - 1" F outlet
- 1" F bypass
- 1/4" F air ports

PN12 - 1500 Bar

Part No.	Bar	Lpm	Air Press
PN12	1500	80	8 Bar

- Max temp 60°C
- 3/8" F inlet - 3/8" F outlet
- 3/8" F bypass
- 1/4" F air ports

PN14 - 800 to 1500 Bar

Part No.	Bar	Lpm	Air Press
PN14-800	800	120	8 Bar
PN14-1500	1500	80	8 Bar

- Max temp 30°C
- 3/4" F inlet & outlet (**PN14-800**)
- 1/2" F inlet & outlet (**PN14-1500**)
- 1/4" F air ports

Pneumatic Regulator Valves

PNR2 - 210 Bar

Part No.	Bar	Lpm	Air Press
PNR2	210	230	8 Bar

- Max temp 85°C
- 1" F inlet - 3/4" F outlet
- 1 1/4" F bypass
- 1/4" F air ports

PN4 - 200 to 450 Bar

Part No.	Bar	Lpm	Air Press
PN4/200	200	500	7 Bar
PN4/300	300	390	7 Bar
PN4/450	450	260	7 Bar

- Max temp 60°C
- 1"1/2 F inlet - 1 1/2" F outlet
- 1"1/2 F bypass
- 1/4" F air ports

PNR1503 - 1500 Bar

Part No.	Bar	Lpm	Air Press
PNR1503	1500	30	7.5 Bar

- Max temp 30°C
- 6mm inlet - 1/2" F outlet
- 1/2" F bypass
- 1/4" F air ports

PNR1510 - 1500 Bar

Part No.	Bar	Lpm	Air Press
PNR1510	1500	100	7.5 Bar

- Max temp 30°C
- 14mm inlet - 1/2" F outlet
- 3/4" F bypass
- 1/4" F air ports

PNR1520 - 1500 Bar

Part No.	Bar	Lpm	Air Press
PNR1520	1500	240	7.5 Bar

- Max temp 30°C
- 19mm inlet - 1" F outlet
- 1 1/4" F bypass
- 1/4" F air ports

PNR4090 - 400 Bar

Part No.	Bar	Lpm	Air Press
PNR4090	400	900	7.5 Bar

- Max temp 40°C
- 63mm inlet - 2 1/2" F outlet
- 2 1/2" F bypass

Pneumatic On-Off Valves

RP30/160 - 160 Bar

Part No.	Bar	Lpm	Air Press
30.3280.00	160	30	7 Bar

- Max temp 90°C
- 1/4" F inlet - 1/4" F outlet
- 1/4" F air port

RP120/160 - 160 Bar

Part No.	Bar	Lpm	Air Press
30.3200.00	160	120	7 Bar

- Max temp 90°C
- 3/4" F inlet - 3/4" F outlet
- 1/4" F air port

RP120/280 - 280 Bar

Part No.	Bar	Lpm	Air Press
30.3230.00	280	120	7 Bar

- Max temp 90°C
- 3/4" F inlet - 3/4" F outlet
- 1/4" F air port

RP80/500 - 500 Bar

Part No.	Bar	Lpm	Air Press
30.3250.00	500	80	7 Bar

- Max temp 90°C
- 1/2" F inlet - 1/2" F outlet
- 1/4" F air port

Foot Operated On-Off Valves

RF120/280 Foot Operated Valve

Part No.	Bar	Lpm
30.5250.00	280	120

- 3/4" F inlet - 3/4" F outlet
- Max temp 90°C

RF80/500 Foot Operated Valve

Part No.	Bar	Lpm
30.5450.00	500	80

- 1/2" F inlet - 1/2" F outlet
- Max temp 90°C

Foot Operated Distributor Valve

Part No.	Bar	Lpm
VP12	1500	80

- 3 x 3/8" F threaded ports
- Max temp 30°C

Chemical Injectors & Metering Valves

Injector - Variable Rate - 3/8" M Threads

Part No.	Lpm	Nozzle
ROBOKIM0	8-11	2
ROBOKIM1	12-15	2.2
ROBOKIM2	16-21	2.5
ROBOKIM3	25-41	2.75

- Max 250 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel ball & spring
- Brass & plastic construction

Injector - Variable Rate - 3/8" M Threads

Part No.	Lpm	Nozzle
0203002110	8-12	1.8
0203002120	10-16	2.1
0203002130	14-21	2.3

- Max 280 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel ball & spring
- Brass construction

Injector - Variable - M22 M x 3/8" M Thread

Part No.	Lpm	Nozzle
21.0180.21	10-15	2.1 mm
21.0180.23	12-18	2.3 mm

- Max 280 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel ball & spring
- Brass construction

M22 Connection

Injector - Variable - 3/8" M Thread

Part No.	Lpm	Nozzle
21.0119.21	10-15	2.1 mm

- Max 350 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel ball & spring
- S/Steel construction

STAINLESS STEEL

Injector - Fixed - M22 M x 3/8" M Thread

Part No.	Lpm	Nozzle
21.0030.21	10-15	2.1 mm

- Max 280 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel ball & spring
- Brass construction

M22 Connection

Metering Valve

Part No.	Max Press	Max Flow
29.0954.00	28 Bar	10 Lpm

- Max temp 40°C
- Panel mounting
- 7mm hose barb
- Brass construction
- Teflon® seals

Metering Valve

Part No.	Max Press	Max Flow
29.0945.00	28 Bar	10 Lpm

- Max temp 40°C
- Panel mounting
- 7mm hose barb
- Brass construction
- Teflon® seals

Metering Valve

Part No.	Max Press	Max Flow
29.0980.00	28 Bar	10 Lpm

- Max temp 40°C
- Panel mounting
- 7mm hose barb
- Brass construction
- Viton seals

Twin Inlet Metering Valve

Part No.	Max Press	Max Flow
29.0900.00	0.5 Bar	1 Lpm

- Max temp 60°C
- 7mm hose barb

Metering Valve

Part No.
SPL5324

- Manufactured in S/Steel
- 6mm hose barbs

STAINLESS STEEL

Dema Constant Pressure Injectors

Part No.	Lpm	Ports in & out
2480-202BS	1-75	3/8" F
2480-203BS	2-170	3/8" F
2480-204BS	8-250	1/2" F
2480-206BS	8-380	3/4" F

- Max press 200 Bar
- Max temp 90°C
- 1/4" chemical barb
- S/Steel adjusting screws
- Brass & S/Steel
- Externally adjustable flow
- Adjustable injection rates
- Chemical suction hose included

For chemical metering is proportional to knob rotation and position

Chemical Filter

Part No.	Description
F1	No check valve
F2	With check valve

- 1/4" hose barb
- Plastic & brass construction

Weighted Filter

Part No.	Description
28.1010.00	No check valve

- 8mm hose barb
- 50 mesh
- Plastic & brass construction
- Fitted with brass weight

Chemical Suction Kit

Part No.
209-1006

- Weighted chemical filter
- 1.5m of 6mm hose

Interpump Chemical Suction Kit

Part No.
CHEMKIT

- Weighted chemical filter
- 1.25m of 8mm hose
- With brass inlet connector
- For Interpump integrated injectors

Water Tanks & Accessories

Water Tank - 4 Litre

Part No.
28.2000.00

- Max temp 60°C
- 274.5L x 126.5W x 217H mm

This tank does not have holes but is supplied with a lid.

Complete Water Tank - 4 Litre

Part No.
28.2020.00

- 3/4" Ø barb outlet
- 3/8" BSPM inlet
- 1/2" Ø barb overflow
- Max temp 60°C
- 274.5L x 126.5W x 217H mm

Supplied with adjustable float valve, stainless steel filter & elbow

Float Valve

Part No.
29.0150.00

- Max press 10 Bar
- Max flow 28.5 Lpm at 1 Bar
- Max flow 30 Lpm at 2 Bar
- Max temp 60°C
- 3/4" M inlet thread
- Plastic construction

Float Valve

Part No.	Thread
29.0160.00	3/8" M inlet
29.0160.10	1/2" M inlet
29.0160.20	3/4" M inlet
Note: Inlet barb not included	

- Max press 10 Bar
- Max flow 20 Lpm at 1 Bar
- Max temp 60°C
- Plastic & brass construction

Water Tank Filter

Part No.
28.0055.00

- 3/8" M inlet thread
- Strainer for tanks
- S/Steel mesh

Pressure Wash Auxiliaries

Pulsation Dampeners

Pulsation Dampener - up to 90 Bar

Part No.	Max Bar	Port	Description	Dimensions L x Ø (mm)
ACCUMULATOR	90	3/4" BSPM	Plated steel	191 x 55

- Working pre-charged pressure 6-15 Bar
- Can be charged using a standard tyre inflator

Dampener should be set at 20% of pump working pressure.

Pulsation Dampener - up to 350 Bar

Part No.	Vol. Ltr	Press Bar	Ports	Description	Dimensions L x Ø (mm)
A4X	0.35	210	1/2" BSPM	AISI 316 S/Steel	160 x 97
A7	0.7	210	1/2" BSPM	Forged steel	181 x 116
A7S	0.75	350	1/2" BSPM	Forged steel	220 x 130
A7X	0.7	150	3/4" BSPM	AISI 316 S/Steel	282 x 90
A15	1.5	330	3/4" BSPM	Forged steel	355 x 114
A15X	1.5	150	3/4" BSPM	AISI 316 S/Steel	355 x 114

- Factory set to order
- Nitrile diaphragm

Dampeners should be set at 60% of pump working pressure. We can pre-charge units to order up to a maximum of 200 Bar, contact sales office before ordering.

Part No.	Vol. Ltr	Press Bar	Port	Description	Dimensions L x Ø (mm)
4139500025	0.16	210	3/8" NPTF	Forged steel	127 x 70
4139500026	0.35	210	1/2" NPTF	Forged steel	153 x 96

- Pre-charged to 40 Bar
- NBR diaphragm

Dampeners should be set at 60% of pump working pressure. We can pre-charge units to order up to a maximum of 200 Bar, contact sales office before ordering.

Pressure Switches

PS6 Pressure Switches

Part No.	Switch Press
0205007000	15 Bar
0205007010	25 Bar
0205007020	45 Bar

- 250 Bar rated pressure
- 75°C rated temperature
- 250 Volt, 16 Amp
- 1/4" M thread
- Brass nipple
- 1200mm cable

PR16 Pressure Switch

Part No.	Switch Press
29.0040.15	25 Bar

- 250 Bar rated pressure
- 75°C rated temperature
- 250 Volt, 16 Amp
- 3/8" M thread
- Brass nipple
- 1200mm cable

Pressure Switch

Part No.	Switch Press
SIMPLEX	30 Bar

- 50-200 Bar rated pressure
- 1/4" M thread
- 250 Volt, 5 Amp

Pump Thermal Protector



Pump Thermal Protector

Part No.	Thread
60.0630.00	1/4" BSPM
60.0630.50	3/8" BSPM
60.0630.70	1/2" BSPM

- Relief temperature 63°C
- Installed on pump inlet, max 10 Bar
- Protects against excessive heat
- Protects beyond 8.6 Bar inlet pressure
- 90° outlet

Must be pressure fed to operate correctly

Easy Starter Valve

Easy Starter Valve

Part No.
EASYSTART

- Max press 280 Bar
- Max flow 30 Lpm
- Max temp 80°C
- 3/8" M thread - 1/4" hose tail
- Constructed of chrome plated brass
- Eases the starting of engine driven plunger pumps

Engine Speed Controllers

Engine Speed Controller

Part No.
SPEEDMATIC

- Max press 200 Bar
- Max temp 75°C
- 3/8" M thread
- Reduces engine RPM when the trigger gun is released
- Reduces fuel usage, noise and wear on the unit

Engine Speed Controller

Part No.	Plunger Stroke	Activation Press
29.0120.00	7mm	15-36 Bar
29.0130.00	14mm	5-20 Bar

- Max press 250 Bar
- Max temp 160°C
- 1/4" BSPM inlet
- Reduces engine RPM when the trigger gun is released
- Reduces fuel usage, noise and wear on the unit

ETC Speed Controller

Part No.
4132400001

- 360 Bar rated pressure
- 5-20 Bar actuation pressure
- 160°C max water temp
- 7-14mm adjustable stroke
- Brass construction
- 3/8" BSPT male thread
- 1m cable

ETC-INOX Speed Controller

Part No.
4132400002

- 500 Bar rated pressure
- 5-20 Bar actuation pressure
- 160°C max water temp
- 7-14mm adjustable stroke
- Stainless steel construction
- 3/8" BSPT male thread
- 1m cable

Inlet & Suction Filters

Inlet Filter - Aluminium

Part No.	Threads
3350-1000	1/2" F x 1/2" M

- Max press 10 Bar
- Max flow 22 Lpm
- Max temp 80°C
- 50 Mesh S/Steel screen
- Aluminium body - plastic cap
- 2x 1/4" F bypass ports

F5B Inlet Filter - Polypropylene

Part No.	Threads
28.0350.20	1/2" F x 1/2" F

- Max press 10 Bar
- Max flow 30 Lpm
- Max temp 40°C
- 50 Mesh S/Steel screen
- Reinforced polypropylene body
- Brass threaded inserts
- 1/4" F bypass port

Y Filter - Brass

Part No.	Threads	Screen
402-1000	1/4" F	45 mesh
402-1001	3/8" F	45 mesh
402-1002	1/2" F	45 mesh
402-1003	3/4" F	45 mesh
402-1004	1" F	45 mesh
402-1005	1 1/4" F	40 mesh
402-1006	1 1/2" F	40 mesh
402-1007	2" F	40 mesh

- 304 S/Steel screen
- Max temp 80°C
- Max press 20 Bar

Y Filter - Stainless Steel

Part No.	Threads	Screen
23.0048	3/8" BSP F	35 mesh
23.0049	1/2" BSP F	18 mesh
23.0050	3/4" BSP F	18 mesh
23.0051	1" BSP F	18 mesh

- Max press 55 Bar
- AISI 316 S/Steel body

Hose Connector with Filter

Part No.	Thread	Barb
300312	1/2" M	3/4"



- Max press 10 Bar
- Brass construction
- With internal filter cone

Interpump Inline Inlet Filter

Part No.	Thread	Barb
ZSACCTX	1/2" M	1/2"

Inlet & Suction Filters

Nylon Cylinder Filter - 50 Mesh Screen

Part No.	Thread	Size mm
3350-0069	3/4" M	165 L x 32 Ø

Nylon Cylinder Filter - 50 Mesh Screen



Part No.	Barb	Size mm
3350-0032	3/4"	165 L x 32 Ø

Barbs & Flynut for Cylinder Filter

Part No.	For Use with B3500
C1400	1/4" flat seat barb
C3800	3/8" flat seat barb
C1200	1/2" flat seat barb
C5800	5/8" flat seat barb
C3400	3/4" flat seat barb
B3500	3/4" F flynut

- Must use B3500 flynut to fix barb to cylinder filter

Nylon Foot Filter - 20 Mesh Screen

Part No.	Dia	Barb
8060000	100mm	15mm
8060001	100mm	20mm
8060002	125mm	20mm
8060003	125mm	25mm
8060004	125mm	30mm
8060005	150mm	30mm
8060006	150mm	35mm
8060007	150mm	40mm

Weighted Filter - 50 Mesh Screen

Part No.	Inlet	Ø mm
FIL12B50	1/2" Barb	45
FIL58B50	5/8" Barb	45
FIL34B50	3/4" Barb	45
FIL10B50	1" Barb	45

- Nylon, brass & S/Steel construction
- Replaceable filter element - see below

Part No.	Description
C00100005	45 mm filter element

Weighted Filter - 50 Mesh Screen

Part No.	Inlet	Ø mm
FIL34F50	3/4" F Thread	45
FIL200F50	2" F Thread	90

- Nylon, brass & S/Steel construction
- Replaceable filter element - see below

Part No.	Description
C00100005	45 mm filter element
C00100012	90 mm filter element

Suction Filter & Hose Kits

*Interpump inlet filter

Part No.	Size	Lpm
209-1012*	3m 1/2"	12
209-1013	3m 1/2"	12
209-1058	3m 5/8"	13-14
209-1034	3m 3/4"	15-21

- 50 mesh weighted filter
- Hose clips included
- PVC extra flex hose
- *Includes Interpump inlet filter

Heavy Duty Suction Filter & Hose Kits

*Interpump inlet filter

Part No.	Size	Lpm
209-1012HD*	3m 1/2"	12
209-1013HD	3m 1/2"	12
209-1058HD	3m 5/8"	13-14
209-1034HD	3m 3/4"	15-21
209-1010	4m 1"	22+

- 50 mesh weighted filter
- Hose clips included
- PVC wire reinforced hose
- *Includes Interpump inlet filter

Weighted Filter

Part No.
23.0017

- 50 mesh S/Steel screen
- 1/2" & 3/4" hose barbs
- Plated steel end caps
- 45mm diameter
- Removable 1/2" barb

Diesel Filters

Page 328

Diesel Filters

Page 328

Filler Caps & Tubes



Page 328

Lavor Burner Units - 110 & 240 Volts

Size	Part No.	Volts	Flow Lpm	Coil Length	Gas Oil Gph	Thermic Kcal/H	Height mm	Weight
Small	8.690.0026	110	12	20m	1.25	49,000	A=405 B=510	39
	8.690.0041	240						
Medium	8.690.0049	110	15	29.5m	1.5	63,000	A=465 B=560	48.5
	8.690.0039	240						
Large	8.690.0050	110	21	36.5m	1.5	63,000	A=600 B=690	54.5
	8.690.0040	240						

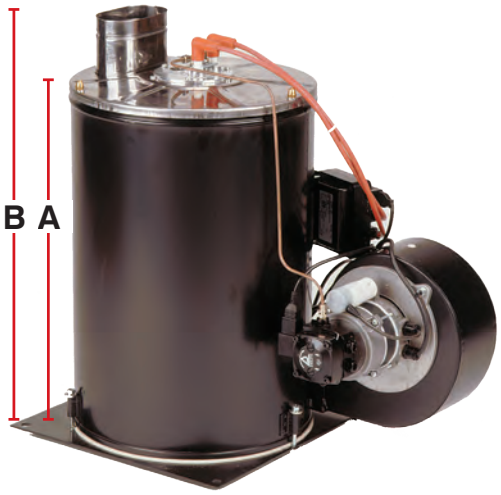

- 200 Bar max water pressure
- 10 bar oil pressure
- 60A nozzle angle
- 250 Bar test pressure
- 500 Bar burst pressure
- 88% efficiency
- 80dB at 1m
- UNI5468/65 spec material
- 2.2mm tube thickness, external Ø 17mm
- C/w fuel pump, motor, pump solenoid valve, starting transformer, heating coil & all cables

Spares for Lavor Burner Units

Burner Nozzles

Part No.	Size	For Burner Size
3.104.0028	1.25	12 Lpm
3.104.0027	1.5	15 & 21 Lpm

Ignition Cables

Part No.	Length	For Burner Size
5.611.0101	480mm	21 Lpm
5.611.0098	580mm	12 & 15 Lpm



Danfoss BFP Burner Oil Pump

Part No.	Volts
3.551.0037	240
3.551.0044	110

- With solenoid



Burner Coil

Part No.	Length	For Burner Size
4.604.0001	20m	12 Lpm
4.604.0003	29.5m	15 Lpm
4.604.0004	36.5m	21 Lpm

Burner Oil Pump Coupling

Part No.
6.605.0173

Transformers

Part No.	Volts
6.605.0102	240
6.605.0106	110

Burner Motors

Part No.	Volts
3.300.0003	240
3.300.0011	110

Electrode - Fits all models

Part No.	Description
4.614.0004	Twin



Pressure Wash Components

General Burner Accessories

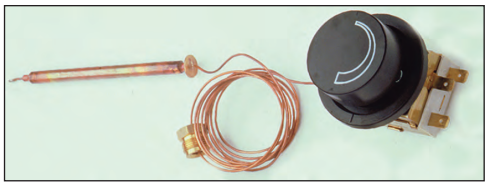

Thermostat

Part No.	Max Temp	Description
12.5050.00	120°C	Use with 29.0250.00
12.5060.00	120°C	Use with 29.0254.31

- Max 240 Volts
- Max 16 Amps

Thermostat Probe Cover

Part No.
29.0250.00

- Fits thermostat 12.5050.00

Thermostat Probe Cover

Part No.
29.0254.31

- Fits thermostat 12.5060.00

Steam Valve

Part No.	Max Press	Max Flow	Nozzle
29.0920.12	250 Bar	8 Lpm	1.2mm
29.0920.70	250 Bar	17 Lpm	043

- Max temp 80°C
- Panel mounting unit
- 1/4" M threaded ports

Thermostat Probe Fitting

Part No.
29.0260.35

- Max press 280 Bar
- Max temp 160°C
- 3 x 3/8" BSP female ports
- 1 x 1/2" BSP female port
- Brass body

Flow Switch - 250 Bar

Part No.
28.0500.10

- Max press 250 Bar
- Max flow 30 Lpm
- Max temp 80°C
- 230 Volt - 3 Amp
- 3/8" M threaded ports
- Min. flow in vertical position 3 Lpm
- Min. flow in horizontal position 3 Lpm

Flow Switch - 350 Bar

Part No.
28.0400.10

- Max press 350 Bar
- Max flow 30 Lpm
- Max temp 80°C
- 230 Volt - 3 Amp
- 3/8" BSP female threaded ports
- Min. flow in vertical position 9 Lpm
- Min. flow in horizontal position 6 Lpm

Flow Switch - 500 Bar

Part No.
28.0450.00

- Max press 500 Bar
- Max flow 30 Lpm
- Max temp 80°C
- 230 Volt - 3 Amp
- 3/8" BSP female threaded ports
- Min. flow in vertical position 9 Lpm
- Min. flow in horizontal position 6 Lpm

Descaling Injection Pump

Part No.	Volts
12.5010.00	24 A/C
12.5011.00	230 A/C

- Flow rate 24 Grms/hour
- Max press 0.5 Bar
- Max temp 40°C

Descaler Bottle

Part No.
14.6505.00

- 2 litre capacity

Steam Nozzle

Part No.
17.0433

- Max press 100 Bar
- Max temp 130°C
- 1/4" BSP female inlet
- Brass construction